



Securing Unix And Linux by **Scott A. Barry**

```
chmod -R 000 Lock / 777 Unlock
```

Securing Unix And Linux

Lock The System Utility For Locking Unix
Bash ./ secure-unix.srt secure your unix like
system ... Works on GNU Linux Solaris Mac OS
FreeBSD AIX Ubuntu Kubuntu Slackware ...

chmod -R 000 Lock / 777 Unlock



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ; passwd root/usr/kubuntu/guest ;`
- `date | base64 ; ctrl-shift-v` five times to lock it ... ;
- `chmod -R 000 /bin/su ;`
- `chmod -R 000 /sbin/su ;`
- `chmod -R 000 /usr/bin/su ;`
- `chmod -R 000 /usr/sbin/su ;`

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/sudo ;`
- `chmod -R 000 /sbin/sudo ;`
- `chmod -R 000 /usr/bin/sudo ;`
- `chmod -R 000 /usr/sbin/sudo ;`

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/sudoedit ;`
- `chmod -R 000 /sbin/sudoedit ;`
- `chmod -R 000 /usr/bin/sudoedit ;`
- `chmod -R 000 /usr/sbin/sudoedit ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/doas ;`
- `chmod -R 000 /sbin/doas ;`
- `chmod -R 000 /usr/bin/doas ;`
- `chmod -R 000 /usr/sbin/doas ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/gksudo ;`
- `chmod -R 000 /sbin/gksudo ;`
- `chmod -R 000 /usr/bin/gksudo ;`
- `chmod -R 000 /usr/sbin/gksudo ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/passwd ;`
- `chmod -R 000 /sbin/passwd ;`
- `chmod -R 000 /usr/bin/passwd ;`
- `chmod -R 000 /usr/sbin/passwd ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/bluetooth ;`
- `chmod -R 000 /sbin/bluetooth ;`
- `chmod -R 000 /usr/bin/bluetooth ;`
- `chmod -R 000 /usr/sbin/bluetooth ;`

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/bluetoothd ;`
- `chmod -R 000 /sbin/bluetoothd ;`
- `chmod -R 000 /usr/bin/bluetoothd ;`
- `chmod -R 000 /usr/sbin/bluetoothd ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/cupsd ;`
- `chmod -R 000 /sbin/cupsd ;`
- `chmod -R 000 /usr/bin/cupsd ;`
- `chmod -R 000 /usr/sbin/cupsd ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /bin/ssh-agent ;`
- `chmod -R 000 /sbin/ssh-agent ;`
- `chmod -R 000 /usr/bin/ssh-agent ;`
- `chmod -R 000 /usr/sbin/ssh-agent ;`



Contents



Thumbnails



Reviews



Bookmarks

chmod -R 000 Lock / 777 Unlock

- `sudo -i ; / su root ;`
- `chmod -R 000 /etc/avahi`
- `chmod -R 000 /etc/avahi-daemon ;`
- `chmod -R 000 /etc/default/avahi-daemon ;`
- `chmod -R 000 /etc/default/avahi ;`

Spoof The Mac And DNS

- Spoofed Mac Address : F4:F4:F4:F4:F4:F4
- DNS : 45.60.1.1 / 8.8.8.8 / 1.1.1.1 ...
- Luks For Drive Encryption and 2 BIOS Passwords For The SSD System ...
- Computer And User Names are (usr) ...
- Disabling ICMP Echo Ping Optional ...



Contents



Thumbnails



Reviews



Bookmarks

Gufw Firewall of Choice

- In Kububtu*org sudo -i / apt get update / upgrade / install gufw ...
- Gufw > Public > Incoming > Rejected ...
- Now Incoming is set to REJECTED !!!
- Limited Driver Mode CTRL-ALT-ESCAPE ...
- CLI Mode CTRL-SHIFT-BACKSPACE ...
- Ctlr-Alt-T > dissenter-browser / firefox ...


```
# Secure-Unix A Lock The System Utility for locking Unix ... ;
# bash ./ secure-unix.srt secure your unix like system ... ;
# Works on Mac / Unix / Aix / Solaris / Linux / FreeBSD ... ;
# Works on GNU / Ubuntu / Kubuntu / Nix-Like Kernels ... ;
# su root / passwd root / sudo -i / passwd kubuntu/usr ... ;
# chmod -R 000 locks it chmod -R 777 unlocks it ... ;
sudo -i ; su root ; sudo -i ; su root ; sudo -i ; su root ;
chmod -R 000 /bin/su ;
chmod -R 000 /sbin/su ;
chmod -R 000 /usr/bin/su ;
chmod -R 000 /usr/sbin/su ;
chmod -R 000 /bin/sudo ;
chmod -R 000 /sbin/sudo ;
chmod -R 000 /usr/bin/sudo ;
chmod -R 000 /usr/sbin/sudo ;
chmod -R 000 /bin/sudoedit ;
chmod -R 000 /sbin/sudoedit ;
chmod -R 000 /usr/bin/sudoedit ;
chmod -R 000 /usr/sbin/sudoedit ;
chmod -R 000 /bin/gksudo ;
chmod -R 000 /sbin/gksudo ;
chmod -R 000 /usr/bin/gksudo ;
chmod -R 000 /usr/sbin/gksudo ;
chmod -R 000 /bin/doas ;
chmod -R 000 /sbin/doas ;
chmod -R 000 /usr/bin/doas ;
chmod -R 000 /usr/sbin/doas ;
chmod -R 000 /bin/passwd ;
chmod -R 000 /sbin/passwd ;
chmod -R 000 /usr/bin/passwd ;
chmod -R 000 /usr/sbin/passwd ;
chmod -R 000 /bin/bluetooth ;
chmod -R 000 /sbin/bluetooth ;
chmod -R 000 /usr/bin/bluetooth ;
chmod -R 000 /usr/sbin/bluetooth ;
chmod -R 000 /bin/bluetoothd ;
chmod -R 000 /sbin/bluetoothd ;
chmod -R 000 /usr/bin/bluetoothd ;
chmod -R 000 /usr/sbin/bluetoothd ;
chmod -R 000 /bin/cupsd ;
chmod -R 000 /sbin/cupsd ;
chmod -R 000 /usr/bin/cupsd ;
chmod -R 000 /usr/sbin/cupsd ;
chmod -R 000 /bin/ssh-agent ;
chmod -R 000 /sbin/ssh-agent ;
chmod -R 000 /usr/bin/ssh-agent ;
chmod -R 000 /usr/sbin/ssh-agent ;
chmod -R 000 /etc/avahi ;
chmod -R 000 /etc/avahi-daemon ;
chmod -R 000 /etc/default/avahi ;
chmod -R 000 /etc/default/avahi-daemon ;
chmod -R 000 /bin/su ;
chmod -R 000 /sbin/su ;
```

Who runs the World in 2021 ???
Anti Zionism & Anti Globalism ;
Archive*org/today > ;
Antipsychiatry*org ;
DuckDuckGo*com > ;
#flushyourmeds "flushyourmeds" ;
DuckDuckGo*com > ;
#bdsmovement "bdsmovement" ;
Anti Mossad/Anti ADL/Anti SPLC ;
##//!!-----!!\\## ;
<https://tinyurl.com/yyrfttwv> ;
<https://tinyurl.com/y2yssp97> ;
<https://tinyurl.com/yxb45d2y> ;
<https://tinyurl.com/y3mrkkx8> ;
<https://tinyurl.com/yy298h3s> ;
<https://tinyurl.com/yyr2yeov> ;
<https://lbry.tv/@invalid0:d> ;
<https://odysee.com/@invalid0:d> ;
<https://archive.today/SNGU4> ;
<https://tinyurl.com/y5aa2vwa> ;
<https://rumble.com/user/flushyourmeds> ;
<https://soundcloud.com/user-176652763> ;
<https://flushyourmeds.my-free.website> ;
<https://flushyourmeds.nethouse.ru> ;

Anti Zionism and Anti Globalism

Flushyourmeds*my-free*website

Flushyourmeds*nethouse*ru

Archive*vn/SNGU4

Tinyurl*com/y8bzzp7y /ybg8qt3r /ydbzrht5

Dissenter*com/Kubuntu*org/Gufw In Rej Pub

I tested it by searching (David Duke) ...

Lbry*tv/*com = Has David Duke

Bitchute*com = Has David Duke

Brighteon*com = Has David Duke

Altensored*com = Has David Duke

Archive*today/*org = Has David Duke

Minds*com = Has David Duke

Rumble*com = Has David Duke

Odysee*com = Has David Duke

25 GOOD REASONS WHY PSYCHIATRY MUST BE ABOLISHED

by Don Weitz

- 1. Because psychiatrists frequently cause harm, permanent disabilities, death - death of the body-mind-spirit.**
- 2. Because psychiatrists frequently violate the Hippocratic Oath which orders all physicians "First Do No Harm."**
- 3. Because psychiatrists patronize and disempower people, especially their patients.**
- 4. Because psychiatry is not a medical science.**
- 5. Because psychiatry is quackery, a pseudo-science which lacks independent diagnostic tests, testable hypotheses, and cures for "schizophrenia" and all other types of alleged "mental illness" or "mental disorder".**
- 6. Because psychiatrists can not accurately and reliably predict dangerousness, violence, or any other type of human behaviour, yet make such claims as "expert witnesses", and with the media promote the "dangerous mental patient" myth/stereotype.**
- 7. Because psychiatrists have caused a worldwide epidemic of brain damage by promoting and prescribing brain-disabling treatments such as the neuroleptics, antidepressants, electroconvulsive brainwashing (electroshock), and psychosurgery (lobotomy).**
- 8. Because psychiatrists manufacture hundreds of "mental disorders" classified in its bible called "Diagnostic and Statistical Manual of Mental Disorders" (a modern witch-hunting manual); such "mental disorders" and "symptoms" are in fact negative, class-and-culturally-biased moral judgments for dissident ways of coping with personal problems and alternative ways of perceiving, interpreting or being in the world.**
- 9. Because psychiatrists, blinded by their medical model bias, fraudulently pathologize and label people's serious life or existential crises as "symptoms" of "mental illness" or "mental disorder" such as "schizophrenia", "bipolar affective disorder", and "personality disorder".**
- 10. Because psychiatrists compound this fraud by falsely claiming, without scientific proof, that these "mental disorders" are caused by a "biochemical**

imbalance" in the brain, genetic factors or "genetic predispositions", despite the fact that there are no genetic factors in "mental illness".

11. Because psychiatrists frequently misinform their patients, families and the public by claiming that brain-disabling procedures such as the neurotoxins (e.g., "antipsychotic medication" and "antidepressants"), electroconvulsive brainwashing (electroconvulsive therapy/"ECT"), psychosurgery (lobotomy) and other behaviour modification-mind control procedures are "safe, effective and lifesaving". The exact opposite is tragically true.

12. Because psychiatrists routinely deceive or lie to patients, prisoners, their families, and the public.

13. Because psychiatrists routinely and willfully violate the medical-ethical principle of "informed consent" by misinforming or not informing their patients about the numerous toxic, disabling and frequently permanent effects of the neuroleptics such as memory loss, tardive dyskinesia, tardive psychosis, parkinsonism, dementia (all signs of brain damage), and death.

14. Because psychiatrists routinely threaten, intimidate or coerce many patients - particularly women, children, the elderly, and prisoners - into consenting to health-threatening/brain-damaging "treatment" such as the antidepressants, neuroleptics, electroconvulsive brainwashing, and hi-risk experiments.

15. Because psychiatrists frequently fail to fully inform psychiatric inmates and prisoners about existing safe and humane, non-medical alternatives in the community such as survivor-controlled crisis centres, drop-ins, self-help or advocacy groups, diet, massage, wholistic medicine, affordable supportive housing, and jobs.

16. Because psychiatrists are sexist in frequently stereotyping women in crisis as "hysterical" or "over-emotional", blaming women whenever they voice real complaints and assertively express their feelings and emotions, prescribing massive doses of tranquilizers and antidepressants to disproportionately large numbers of women, and in sexually assaulting women in their offices and institutions.

17. Because psychiatrists, particularly white male psychiatrists, are homophobic - the American Psychiatric Association (APA) once labelled homosexuality as a "mental illness" or "mental disorder" - and have used forced electroshock on lesbians, trying to coerce them into adopting a heterosexual life style.

- 18. Because psychiatrists are ageist in prescribing tranquilizers, antidepressants ("medication") and electroconvulsive brainwashing for disproportionately large numbers of elderly people - a form of elder abuse.**
- 19. Because psychiatrists are racist in disproportionately incarcerating and drugging people of African descent, aboriginal people, other people of colour and labelling them "psychotic" or "schizophrenic".**
- 20. Because psychiatrists routinely violate people's civil rights, human rights and constitutional rights such as imprisoning innocent people without court trial or public hearing ("involuntary commitment"), and subjecting them to cruel and unusual punishments or tortures such as forced drugging, electroconvulsive brainwashing, psychosurgery, solitary confinement, "chemical restraints", and 4-point or 5-point restraints.**
- 21. Because psychiatrists masterminded the mass murder of hundreds of thousands of vulnerable people including disabled children, the elderly and psychiatric patients during The Holocaust in Nazi Germany, and "selected" hundreds of thousands of concentration camp prisoners for death ("T-4 euthanasia" program) - historical facts still missing in psychiatric textbooks and histories.**
- 22. Because psychiatrists have willingly participated in and administered mind-control experiments in the United States and Canada since the early 1950s - its chief targets have been poor patients, women, dissidents and prisoners.**
- 23. Because psychiatry, particularly institutional-biological psychiatry, is based on the 3 Fs: Fear, Fraud, and Force.**
- 24. Because psychiatry is a form of social control or punishment - not treatment.**
- 25. Because psychiatry, particularly institutional-biological psychiatry, is fascist - a direct threat to democracy, human rights and life.**


From :

<https://web.archive.org/web/20200625174235/http://www.antipsychiatry.org/25reason.htm>

PLEASE SNOWBALL, COPY AND PUBLISH THIS STATEMENT INCLUDING THE NOTE. NO COPYRIGHT OR PERMISSION REQUIRED.

The author, Don Weitz can be reached at his e-mail address: dweitz@interlog.com

Screaming / Gazing Sheet

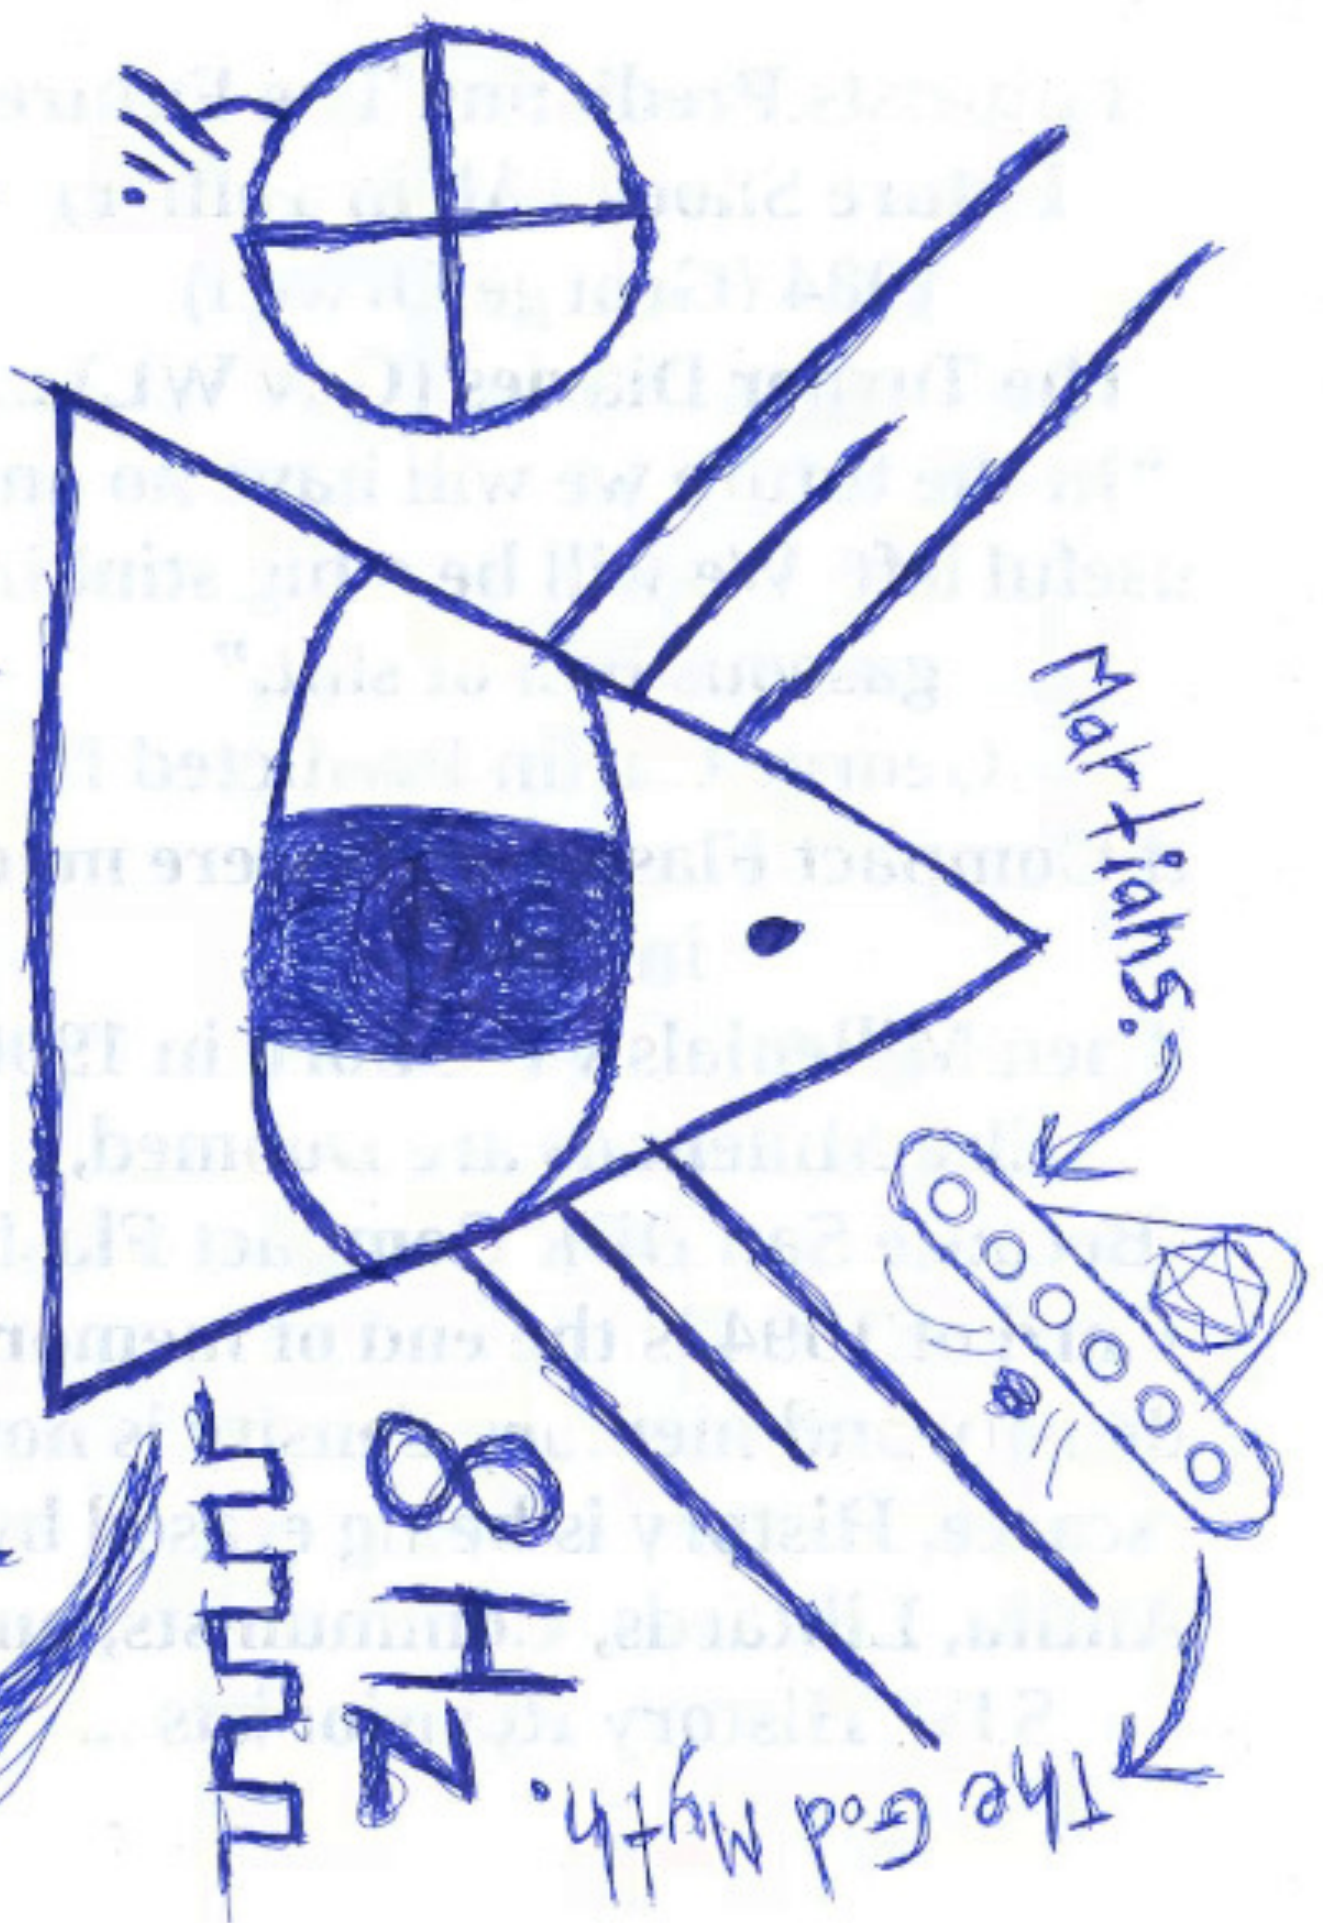



Hi Dominus Sathanas,

Our team has reviewed your content, and, unfortunately, we think it violates our Community Guidelines. We've removed the following content from YouTube:

Video: [Gang Stalking Telepathy](#)



We know that this
YouTube is a safe
you think we've removed
Keep reading for

How your content

Content glorifying
people is not allowed
encourages hate
membership in a
artistic, and scientific
are made for commercial
purpose of posting

LEARN MORE

Telepathy is used to do some of the Gang Stalking, the rest of it is done by useful idiots, patents mentioned by the fake TI community are often outdated ... What does the Telepathic Network know that the Ignorant Masses or useful idiots do not know? The of the Saddam Hussein Statue Toppling was a Staged PSYOP, The Mossad did the September 11th, 2001 Attacks, and Rabbis Celebrated. The Mossad crashed Boeing Flight 757 and did the London Bus Bombings as well as the (OKC) Oklahoma City Bombings. Zionists control all of the Press, Media, Finance, Banking, and Governments. Communism has Jewish roots and Jewish origins, Karl Marx was a Jew and had Jewish Parents, so was Joseph Stalin. Distilled Water cures cancer on a water only fast, and it is proven that other water with a higher (TDS) Total Dissolvable Solid count as well as Fluoridated Water Decreases IQ Scores in Black Males as well. Communism killed 100+ Million, whilst there is hardly any evidence for the Holocaust, plus questioning it in some countries can get you deported, arrested, killed, Now why is that, why are we so backwards ...



Linux Shell Scripting Tutorial Ver. 1.0

Written by Vivek G Gite

I N D E X

- [Introduction](#)
 - [Kernel](#)
 - [Shell](#)
 - [How to use Shell](#)
 - [Common Linux Command Introduction](#)
- [Process](#)
 - [Why Process required](#)
 - [Linux commands related with process](#)
- [Redirection of Standard output/input](#)
 - [Redirectors](#)
 - [Pipes](#)
 - [Filters](#)
- [Shell Programming](#)
 - [Variables in Linux](#)
 - [How to define User defined variables](#)
 - [Rules for Naming variable name](#)
 - [How to print or access value of UDV \(User defined variables\)](#)
 - [How to write shell script](#)
 - [How to Run Shell Scripts](#)
 - [Quotes in Shell Scripts](#)

- [Shell Arithmetic](#)
- [Command Line Processing \(Command Line Arguments\)](#)
- [Why Command Line arguments required](#)
- [Exit Status](#)
- [Filename Shorthand or meta Characters \(i.e. wild cards\)](#)
- [Programming Commands](#)
 - [echo command](#)
 - [Decision making in shell script \(i.e. if command\)](#)
 - [test command or \[expr \]](#)
 - [Loop in shell scripts](#)
 - [The case Statement](#)
 - [The read Statement](#)
- [More Advanced Shell Script Commands](#)
 - [/dev/null - Use to send unwanted output of program](#)
 - [Local and Global Shell variable \(export command\)](#)
 - [Conditional execution i.e. && and ||](#)
 - [I/O Redirection and file descriptors](#)
 - [Functions](#)
 - [User Interface and dialog utility](#)
 - [trap command](#)
 - [getopts command](#)
 - [More examples of Shell Script \(Exercise for You :-\)](#)

Introduction

This tutorial is designed for beginners only and This tutorial explains the basics of shell programming by showing some examples of shell programs. Its not help or manual for the shell. While reading this tutorial you can find manual quite useful (type **man bash** at \$ prompt to see manual pages). Manual contains all necessary information you need, but it won't have that much examples, which makes idea more clear. For that reason, this tutorial contains examples rather than all the features of shell. I assumes you have at least working knowledge of Linux i.e. basic commands like how to create, copy, remove files/directories etc or how to use editor like vi or mcedit and login to your system. Before Starting Linux Shell Script Programming you must know

- Kernel
- Shell
- Process
- Redirectors, Pipes, Filters etc.

What's Kernel


Kernel is hart of Linux O/S. It manages resource of Linux O/S. Resources means facilities available in Linux. For eg. Facility to store data, print data on printer, memory, file management etc . Kernel decides who will use this resource, for how long and when. It runs your programs (or set up to execute binary files) It's Memory resident portion of Linux. It performance following task :-

- I/O management
- Process management
- Device management
- File management
- Memory management


What's Linux Shell

Computer understand the language of 0's and 1's called binary language, In early days of computing, instruction are provided using binary language, which is difficult for all of us, to read and write. So in O/s there is special program called Shell. Shell accepts your instruction or commands in English and translate it into computers native binary language.

This is what Shell Does for US

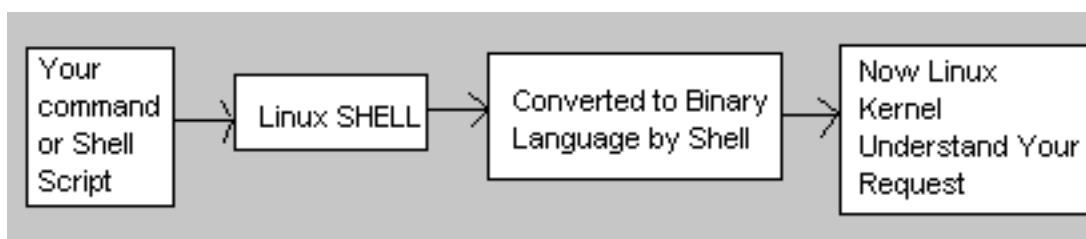

You type Your command and shell convert it as

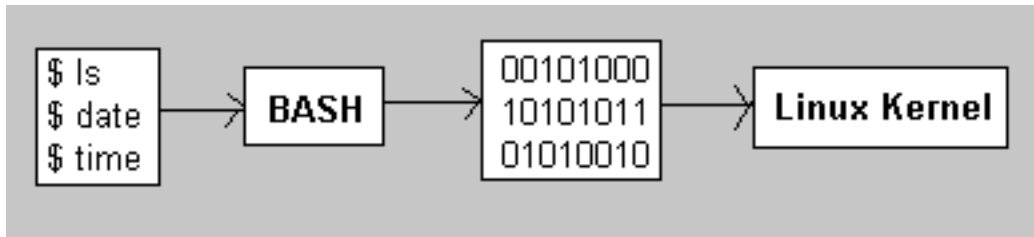

It's environment provided for user interaction. Shell is an command language interpreter that executes commands read from the standard input device (keyboard) or from a file. Linux may use one of the following most popular shells (In MS-DOS, Shell name is COMMAND.COM which is also used for same purpose, but it's not as powerful as our Linux Shells are!)

Shell Name	Developed by	Where	Remark
BASH (Bourne-Again SHell)	Brian Fox and Chet Ramey	Free Software Foundation	Most common shell in Linux. It's Freeware shell.
CSH (C SHell)	Bill Joy	University of California (For BSD)	The C shell's syntax and usage are very similar to the C programming language.
KSH (Korn SHell)	David Korn	AT & T Bell Labs	

Any of the above shell reads command from user (via Keyboard or Mouse) and tells Linux O/s what users want. If we are giving commands from keyboard it is called command line interface (Usually in-front of \$ prompt, This prompt is depend upon your shell and Environment that you set or by your System Administrator, therefore you may get different prompt).

NOTE: To find your shell type following command

\$ echo \$SHELL

How to use Shell

To use shell (You start to use your shell as soon as you log into your system) you have to simply type commands. Following is the list of common commands.

Linux Common Commands

NOTE that following commands are for New users or for Beginners only. The purpose is if you use this command you will be more familiar with your shell and secondly, you need some of these command in your Shell script. If you want to get more information or help for this command try following commands For e.g. To see help or options related with date command try

\$ date --help

or To see help or options related with ls command (Here you will screen by screen help, since help of ls command is quite big that can't fit on single screen)

\$ ls --help | more

Syntax: *command-name --help*

Syntax: *man command-name*

Syntax: *info command-name*

See what happened when you type following

\$ man ls

\$ info bash

NOTE: In MS-DOS, you get help by using /? clue or by typing help command as

C:\> dir / ?

C:\> date / ?

C:\> help time

C:\> help date

C:\> help

Linux Command

For this Purpose	Use this Command Syntax	Example (In front of \$ Prompt)
To see date	date	\$ date
To see who's using system.	who	\$ who
Print working directory	pwd	\$ pwd
List name of files in current directory	ls or dirs	\$ ls
To create text file NOTE: Press and hold CTRL key and press D to stop or to end file (CTRL+D)	cat > { file name }	\$ cat > myfile <i>type your text</i> <i>when done press</i> <i>^ D</i>
To text see files	cat { file name }	\$ cat myfile
To display file one full screen at a time	more { file name }	\$ more myfile
To move or rename file/directory	mv {file1} {file2}	\$ mv sales sales.99
To create multiple file copies with various link. After this both oldfile newfile refers to same name	ln {oldfile} {newfile}	\$ ln Page1 Book1
To remove file	rm file1	\$ rm myfile

Remove all files in given directory/subdirectory. Use it very carefully.	<code>rm -rf {dirname}</code>	<code>\$ rm -rf oldfiles</code>
<p>To change file access permissions</p> <p>u - User who owns the file g - Group file owner o - User classified as other a - All other system user</p> <p>+ Set permission - Remove permission</p> <p>r - Read permission w - Write permission x - Execute permission</p>	<code>chmod {u g o a} {+ -} {r w x} {filename}</code>	<p><code>\$ chmod u+x,g+wx,o+x myscript</code></p> <p>NOTE: This command set permission for file called 'myscript' as User (Person who creates that file or directory) has execute permission (u+x) Group of file owner can write to this file as well as execute this file (g+wx) Others can only execute file but can not modify it, Since we have not given w (write permission) to them. (o+x).</p>
Read your mail.	<code>mail</code>	<code>\$ mail</code>
To See more about currently login person (i.e. yourself)	<code>who am i</code>	<code>\$ who am i</code>
To login out	<code>logout</code> (OR press CTRL+D)	<p><code>\$ logout</code></p> <p><i>(Note: It may ask you password type your login password, In some case this feature is disabled by System Administrator)</i></p>
Send mail to other person	<code>mail {user-name}</code>	<code>\$ mail ashish</code>
To count lines, words and characters of given file	<code>wc {file-name}</code>	<code>\$ wc myfile</code>
To searches file for line that match a pattern.	<code>grep {word-to-lookup} {filename}</code>	<code>\$ grep fox myfile</code>
<p>To sort file in following order</p> <p>-r Reverse normal order -n Sort in numeric order -nr Sort in reverse numeric order</p>	<code>sort -r -n -nr {filename}</code>	<code>\$ sort myfile</code>

To print last first line of given file	tail - + { linenumber } { filename }	\$ tail + 5 myfile
To Use to compare files	cm p { file 1 } { file 2 } <u>OR</u> diff { file 1 } { file 2 }	\$ cm p myfile myfile.old
To print file	pr { file-name }	\$ pr myfile

© 1998-2000 [FreeOS.com](http://www.freeos.com) (I) Pvt. Ltd. All rights reserved.

What is Processes

Process is any kind of program or task carried out by your PC. For e.g. `$ ls -lR`, is command or a request to list files in a directory and all subdirectory in your current directory. It is a process. A process is program (command given by user) to perform some Job. In Linux when you start process, it gives a number (called PID or process-id), PID starts from 0 to 65535.

Why Process required

Linux is multi-user, multitasking o/s. It means you can run more than two process simultaneously if you wish. For e.g.. To find how many files do you have on your system you may give command like

```
$ ls / -R | wc -l
```

This command will take lot of time to search all files on your system. So you can run such command in Background or simultaneously by giving command like

```
$ ls / -R | wc -l &
```

The ampersand (&) at the end of command tells shells start command (`ls / -R | wc -l`) and run it in background takes next command immediately. An instance of running command is called process and the number printed by shell is called process-id (PID), this PID can be use to refer specific running process.

Linux Command Related with Process

For this purpose	Use this Command	Example
To see currently running process	<code>ps</code>	<code>\$ ps</code>
To stop any process i.e. to kill process	<code>kill {PID}</code>	<code>\$ kill 1012</code>
To get information about all running process	<code>ps -ag</code>	<code>\$ ps -ag</code>
To stop all process except your shell	<code>kill 0</code>	<code>\$ kill 0</code>
For background processing (With &, use to put particular command and program in background)	<code>linux-command &</code>	<code>\$ ls / -R wc -l &</code>

NOTE that you can only kill process which are created by yourself. A Administrator can almost kill 95-98% process. But some process can not be killed, such as VDU Process.

Redirection of Standard output/ input or Input - Output redirection

Mostly all command gives output on screen or take input from keyboard, but in Linux it's possible to send output to file or to read input from file. For e.g. `$ ls` command gives output to screen; to send output to file of `ls` give command, `$ ls > filename`. It means put output of `ls` command to filename. There are three main redirection symbols `>`, `>>`, `<`

(1) > Redirector Symbol

Syntax: *Linux-command > filename*

To output Linux-commands result to file. Note that If file already exist, it will be overwritten else new file is created. For e.g. To send output of `ls` command give `$ ls > myfiles`

Now if 'myfiles' file exist in your current directory it will be overwritten without any type of warning. (What if I want to send output to file, which is already exist and want to keep information of that file without losing previous information/data?, For this Read next redirector)

(2) >> Redirector Symbol

Syntax: *Linux-command >> filename*

To output Linux-commands result to END of file. Note that If file exist, it will be opened and new information / data will be written to END of file, without losing previous information/data, And if file is not exist, then new file is created. For e.g. To send output of `date` command to already exist file give `$ date >> myfiles`


(3) < Redirector Symbol

Syntax: *Linux-command < filename*

To take input to Linux-command from file instead of key-board. For e.g. To take input for `cat` command give `$ cat < myfiles`

Pips

A pipe is a way to connect the output of one program to the input of another program without any temporary file.

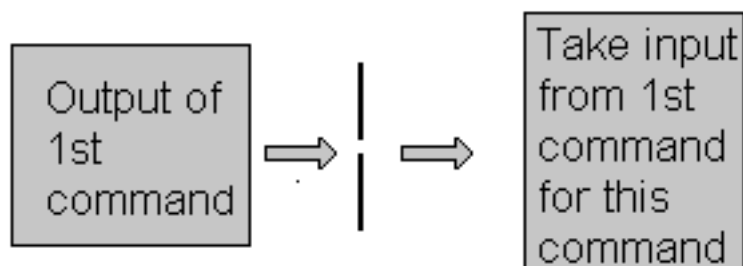

A pipe is nothing but a temporary storage place where the output of one command is stored and then passed as the input for second command. Pipes are used to run more than two commands (Multiple commands) from same command line.

Syntax: *command1 | command2*

Command using Pips	Meaning or Use of Pipes
\$ ls more	Here the output of ls command is given as input to more command So that output is printed one screen full page at a time
\$ who sort	Here output of who command is given as input to sort command So that it will print sorted list of users
\$ who wc -l	Here output of who command is given as input to wc command So that it will number of user who logon to system
\$ ls -l wc -l	Here output of ls command is given as input to wc command So that it will print number of files in current directory.
\$ who grep raju	Here output of who command is given as input to grep command So that it will print if particular user name if he is logon or nothing is printed (To see for particular user logon)

Filter

If a Linux command accepts its input from the standard input and produces its output on standard output is know as a filter. A filter performs some kind of process on the input and gives output. For e.g.. Suppose we have file called 'hotel.txt' with 100 lines data, And from 'hotel.txt' we would like to print contains from line number 20 to line number 30 and store this result to file called 'hlist' then give command

\$ tail + 20 < hotel.txt | head -n30 > hlist

Here head is filter which takes its input from tail command (tail command start selecting from line number 20 of given file i.e. hotel.txt) and passes this lines to input to head, whose output is redirected to 'hlist' file.

Introduction to Shell Programming

Shell program is series of Linux commands. Shell script is just like batch file in MS-DOS but have more power than the MS-DOS batch file. Shell script can take input from user, file and output them on screen. Useful to create our own commands that can save our lots of time and to automate some task of day today life.

Variables in Linux

Sometimes to process our data/information, it must be kept in computers RAM memory. RAM memory is divided into small locations, and each location had unique number called memory location/address, which is used to hold our data. Programmer can give a unique name to this memory location/address called memory variable or variable (Its a named storage location that may take different values, but only one at a time). In Linux, there are two types of variable

1) System variables - Created and maintained by Linux itself. This type of variable defined in CAPITAL LETTERS.

2) User defined variables (UDV) - Created and maintained by user. This type of variable defined in lower LETTERS.

Some System variables

You can see system variables by giving command like `$ set`, Some of the important System variables are

System Variable	Meaning
BASH=/bin/bash	Our shell name
BASH_VERSION=1.14.7(1)	Our shell version name
COLUMNS=80	No. of columns for our screen
HOME=/home/vivek	Our home directory
LINES=25	No. of columns for our screen
LOGNAME=students	Our logging name
OSTYPE=Linux	Our o/s type : -)
PATH=/usr/bin:/sbin:/bin:/usr/sbin	Our path settings
PS1=[\u@\h \W]\\$	Our prompt settings
PWD=/home/students/Common	Our current working directory
SHELL=/bin/bash	Our shell name
USERNAME=vivek	User name who is currently login to this PC

NOTE that Some of the above settings can be different in your PC. You can print any of the above variables contain as follows

```
$ echo $USERNAME
```

```
$ echo $HOME
```

Caution: Do not modify System variable this can some time create problems.

How to define User defined variables (UDV)

To define UDV use following syntax

Syntax: *variablename = value*

NOTE: Here 'value' is assigned to given 'variablename' and Value must be on right side = sign For e.g.

```
$ no=10    # this is ok
```

```
$ 10=no    # Error, NOT Ok, Value must be on right side of = sign.
```

To define variable called 'vech' having value Bus

```
$ vech=Bus
```

To define variable called n having value 10

```
$ n=10
```

Rules for Naming variable name (Both UDV and System Variable)

(1) Variable name must begin with Alphanumeric character or underscore character (_), followed by one or more Alphanumeric character. For e.g. Valid shell variable are as follows

```
HOME
```

```
SYSTEM_VERSION
```

```
vech
```

```
no
```

(2) Don't put spaces on either side of the equal sign when assigning value to variable. For e.g.. In following variable declaration there will be no error

```
$ no=10
```

But here there will be problem for following

```
$ no =10
```

```
$ no= 10
```

```
$ no = 10
```

(3) Variables are case-sensitive, just like filename in Linux. For e.g.

```
$ no=10
```

```
$ No=11
```

```
$ NO=20
```

```
$ nO=2
```

Above all are different variable name, so to print value 20 we have to use **\$ echo \$NO** and Not any of the following

```
$ echo $no      # will print 10 but not 20
```

```
$ echo $No      # will print 11 but not 20
```

```
$ echo $nO      # will print 2 but not 20
```

(4) You can define NULL variable as follows (NULL variable is variable which has no value at the time of definition) For e.g.

```
$ vech=
```

```
$ vech= ""
```

Try to print it's value **\$ echo \$vech** , Here nothing will be shown because variable has no value i.e. NULL variable.

(5) Do not use ?,* etc, to name your variable names.

How to print or access value of UDV (User defined variables)

To print or access UDV use following syntax

Syntax: *\$variablename*

For eg. To print contains of variable 'vech'

```
$ echo $vech
```

It will print 'Bus' (if previously defined as vech=Bus) ,To print contains of variable 'n' **\$ echo \$n**

It will print '10' (if previously defined as n=10)

Caution: Do not try **\$ echo vech** It will print vech instead its value 'Bus' and **\$ echo n**, It will print n instead its value '10', You must use \$ followed by variable name.

Q.1.How to Define variable x with value 10 and print it on screen

```
$ x=10
```

```
$ echo $x
```

Q.2.How to Define variable xn with value Rani and print it on screen

```
$ xn=Rani
$ echo $xn
```

Q.3.How to print sum of two numbers, let's say 6 and 3

```
$ echo 6 + 3
```

This will print 6 + 3, not the sum 9, To do sum or math operations in shell use `expr`, syntax is as follows Syntax: *expr op1 operator op2*

Where, op1 and op2 are any Integer Number (Number without decimal point) and operator can be
+ Addition

- Subtraction

/ Division

% Modular, to find remainder For e.g. $20 / 3 = 6$, to find remainder $20 \% 3 = 2$, (Remember its integer calculation)

* Multiplication

```
$ expr 6 + 3
```

Now It will print sum as 9 , But

```
$ expr 6+3
```

will not work because space is required between number and operator (See Shell Arithmetic)

Q.4.How to define two variable x=20, y=5 and then to print division of x and y (i.e. x/y)

```
$ x=20
```

```
$ y=5
```

```
$ expr x / y
```

Q.5.Modify above and store division of x and y to variable called z

```
$ x=20
```

```
$ y=5
```

```
$ z=`expr x / y`
```

```
$ echo $z
```

Note : For third statement, read Shell Arithmetic.

How to write shell script

Now we write our first script that will print "Knowledge is Power" on screen. To write shell script you can use in of the Linux's text editor such as vi or mcedit or even you can use cat command. Here we are using cat command you can use any of the above text editor. First type following cat command and rest of text as its

```
$ cat > first
```

```
#
```

```
# My first shell script
```

```
#
```

```
clear
```

```
echo "Knowledge is Power"
```

Press Ctrl + D to save. Now our script is ready. To execute it type command

```
$ ./ first
```

This will give error since we have not set Execute permission for our script first; to do this type command

```
$ chmod +x first
```

```
$ ./ first
```

First screen will be clear, then Knowledge is Power is printed on screen. To print message of variables contains we user echo command, general form of echo command is as follows

```
echo "Message"
```

```
echo "Message variable1, variable2....variableN"
```


How to Run Shell Scripts

Because of security of files, in Linux, the creator of Shell Script does not get execution permission by default. So if we wish to run shell script we have to do two things as follows

(1) Use `chmod` command as follows to give execution permission to our script

Syntax: `chmod +x shell-script-name`

OR Syntax: `chmod 777 shell-script-name`

(2) Run our script as

Syntax: `./your-shell-program-name`

For e.g.

\$./first

Here '.'(dot) is command, and used in conjunction with shell script. The dot(.) indicates to current shell that the command following the dot(.) has to be executed in the same shell i.e. without the loading of another shell in memory. Or you can also try following syntax to run Shell Script

Syntax: `bash &nbsh;&nbsh; your-shell-program-name`

OR `/bin/sh &nbsh;&nbsh; your-shell-program-name`


For e.g.

\$ bash first

\$ /bin/sh first

Note that to run script, you need to have in same directory where you created your script, if you are in different directory your script will not run (because of path settings), For eg. Your home directory is (use `$ pwd` to see current working directory) `/home/vivek`. Then you created one script called 'first', after creation of this script you moved to some other directory lets say `/home/vivek/Letters/Personal`, Now if you try to execute your script it will not run, since script 'first' is in `/home/vivek` directory, to Overcome this problem there are two ways First, specify complete path of your script when ever you want to run it from other directories like giving following command

\$ /bin/sh /home/vivek/first

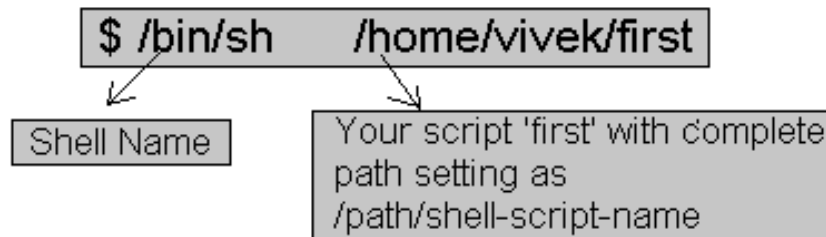

Now every time you have to give all this detailed as you work in other directory, this take time and you have to remember complete path. There is another way, if you notice that all of our programs (in form of executable files) are marked as executable and can be directly executed from prompt from any directory (To see executables of our normal program give command `$ ls -l /bin` or `ls -l /usr/bin`) by typing command like

\$ bc

\$ cc myprg.c

\$ cal

etc, How this happed? All our executables files are installed in directory called `/bin` and `/bin` directory is set in your `PATH` setting, Now when you type name of any command at `$` prompt, what shell do is it first look that command in its internal part (called as internal command, which is part of Shell itself, and always available to execute, since they do not need extra executable file), if found as internal command shell will execute it, If not found It will look for current directory, if found shell will execute command from current directory, if not found, then Shell will Look `PATH` setting, and try to find our requested commands executable file in all of the directories mentioned in `PATH` settings, if found it will execute it, otherwise it will give message "bash: xxxx :command not found", Still there is one question remain can I run my shell script same as these executables. Yes you can, for

this purpose create bin directory in your home directory and then copy your tested version of shell script to this bin directory. After this you can run you script as executable file without using \$./shell script-name syntax, Following are steps

```
$ cd
$ mkdir bin
$ cp first ~ / bin
$ first
```

Each of above command Explanation

Each of above command	Explanation
\$ cd	Go to your home directory
\$ mkdir bin	Now created bin directory, to install your own shell script, so that script can be run as independent program or can be accessed from any directory
\$ cp first ~/bin	copy your script 'first' to your bin directory
\$ first	Test whether script is running or not (It will run)

In shell script comment is given with # character. This comments are ignored by your shell. Comments are used to indicate use of script or person who creates/maintained script, or for some programming explanation etc. Remember always set *Execute permission for you script*.

Commands Related with Shell Programming

(1)echo [options] [string, variables...]

Displays text or variables value on screen.

Options

-n Do not output the trailing new line.

-e Enable interpretation of the following backslash escaped characters in the strings:

\a alert (bell)

\b backspace

\c suppress trailing new line

\n new line

\r carriage return

\t horizontal tab

\\ backslash

For eg. **\$ echo -e "An apple a day keeps away \a\t\tdoctor\n"**

(2)More about Quotes

There are three types of quotes

" i.e. Double Quotes

' i.e. Single quotes

` i.e. Back quote

1. "Double Quotes" - Anything enclose in double quotes removed meaning of that characters (except \ and \$).

2. 'Single quotes' - Enclosed in single quotes remains unchanged.

3. `Back quote` - To execute command.

For eg.

\$ echo "Today is date"

Can't print message with today's date.

\$ echo "Today is `date`"

Now it will print today's date as, Today is Tue Jan, See the `date` statement uses back quote, (See also Shell Arithmetic NOTE).

(3) Shell Arithmetic

Use to perform arithmetic operations For e.g.

```
$ expr 1 + 3
```

```
$ expr 2 - 1
```

```
$ expr 10 / 2
```

```
$ expr 20 % 3 # remainder read as 20 mod 3 and remainder is 2)
```

```
$ expr 10 \ * 3 # Multiplication use \ * not * since its wild card)
```

```
$ echo `expr 6 + 3`
```

For the last statement not the following points

1) First, before expr keyword we used ` (back quote) sign not the (single quote i.e. ') sign. Back quote is generally found on the key under tilde (~) on PC keyboards OR To the above of TAB key.

2) Second, expr is also end with ` i.e. back quote.

3) Here expr 6 + 3 is evaluated to 9, then echo command prints 9 as sum

4) Here if you use double quote or single quote, it will NOT work, For eg.

```
$ echo "expr 6 + 3" # It will print expr 6 + 3
```

```
$ echo 'expr 6 + 3'
```

Command Line Processing

Now try following command (assumes that the file "grate_stories_of" is not exist on your disk)

```
$ ls grate_stories_of
```

It will print message something like -

```
grate_stories_of: No such file or directory
```

Well as it turns out ls was the name of an actual command and shell executed this command when given the command. Now it creates one question What are commands? What happened when you type \$ ls grate_stories_of? The first word on command line, ls, is name of the command to be executed. Everything else on command line is taken as arguments to this command. For eg.

```
$ tail +10 myf
```

Here the name of command is tail, and the arguments are +10 and myf.

Now try to determine command and arguments from following commands:

```
$ ls foo
```

```
$ cp y y.bak
```

```
$ mv y.bak y.okay
```

```
$ tail -10 myf
```

```
$ mail raj
```

```
$ sort -r -n myf
```

```
$ date
```

```
$ clear
```

Command	No. of argument to this command	Actual Argument
ls	1	foo
cp	2	y and y.bak
mv	2	y.bak and y.okay
tail	2	-10 and myf
mail	1	raj
sort	3	-r, -n, and myf
date	0	
clear	0	

NOTE: \$# holds number of arguments specified on command line. and \$* or @\$ refer to all arguments in passed to script. Now to obtain total no. of Argument to particular script, your \$# variable.

Why Command Line arguments required

Let's take rm command, which is used to remove file, But which file you want to remove and how you will you tail this to rm command (Even rm command does not ask you name of file that would like to remove). So what we do is we write as command as follows

```
$ rm {file-name}
```


Here rm is command and file-name is file which you would like to remove. This way you tail to rm command which file you would like to remove. So we are doing one way communication with our command by specifying file-name. Also you can pass command line arguments to your script to make it more users friendly. But how we address or access command line argument in our script.

Lets take ls command

```
$ ls -a /*
```

This command has 2 command line argument -a and /* is another. For shell script,

```
$ myshell foo bar
```

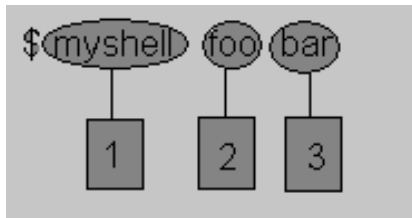

1 Shell Script name i.e. myshell

2 First command line argument passed to myshell i.e. foo

3 Second command line argument passed to myshell i.e. bar

In shell if we wish to refer this command line argument we refer above as follows

1 myshell it is \$0

2 foo it is \$1

3 bar it is \$2

Here \$# will be 2 (Since foo and bar only two Arguments), Please note At a time such 9 arguments can be used from \$0..\$9, You can also refer all of them by using \$* (which expand to ` \$0,\$1,\$2...\$9`) Now try to write following for commands, Shell Script Name (\$0), No. of Arguments (i.e. \$#), And actual argument (i.e. \$1,\$2 etc)

```
$ sum 11 20
```

```
$ math 4 - 7
```

```
$ d
```

```
$ bp -5 myf +20
```

```
$ ls *
```

```
$ cal
```

```
$ findBS 4 8 24 BIG
```

Shell Script Name	No. Of Arguments to script	Actual Argument (\$1,..\$9)				
\$0	\$#	\$0	\$1	\$2	\$3	\$4
sum	2	11	20			
math	3	4	-	7		
d	0					

bp	3	-5	myf	+20		
ls	1	*				
cal	0					
findBS	4	4	8	24	BIG	

For e.g. now will write script to print command line argument and we will see how to access them

```
$ cat > demo
# !/ bin/ sh
#
# Script that demos, command line args
#
echo "Total number of command line argument are $# "
echo "$0 is script name"
echo "$1 is first argument"
echo $2 is second argument"
echo "All of them are :- $* "
```

Save the above script by pressing ctrl+d, now make it executable

```
$ chmod +x demo
$ ./demo Hello World
$ cp demo ~/ bin
$ demo
```

Note: After this, For any script you have to used above command, in sequence, I am not going to show you all of the above.

(5)Exit Status

By default in Linux if particular command is executed, it return two type of values, (Values are used to see whether command is successful or not) if return value is zero (0), command is successful, if return value is nonzero (>0), command is not successful or some sort of error executing command/shell script. This value is know as Exit Status of that command. To determine this exit Status we use \$? variable of shell. For eg.

```
$ rm unknow1file
```

It will show error as follows

```
rm: cannot remove `unkowm1file': No such file or directory
```

and after that if you give command **\$ echo \$?**

it will print nonzero value(>0) to indicate error. Now give command

```
$ ls
```

```
$ echo $?
```

It will print 0 to indicate command is successful. Try the following commands and not down there exit status

```
$ expr 1 + 3
```

```
$ echo $?
```

```
$ echo Welcome
```

```
$ echo $?
```

```
$ wildwest canwork?
```

```
$ echo $?
```

```
$ date
```

```
$ echo $?
```

```
$ echon $?
```

\$ echo \$?

(6)if-then-fi for decision making is shell script Before making any decision in Shell script you must know following things Type **bc** at \$ prompt to start Linux calculator program

\$ bc

After this command bc is started and waiting for you commands, i.e. give it some calculation as follows type 5 + 2 as

5 + 2

7

7 is response of bc i.e. addition of 5 + 2 you can even try

5 - 2

5 / 2

Now what happened if you type 5 > 2 as follows

5 > 2

0

0 (Zero) is response of bc, How? Here it compare 5 with 2 as, Is 5 is greater then 2, (If I ask same question to you, your answer will be YES) In Linux (bc) gives this 'YES' answer by showing 0 (Zero) value. It means when ever there is any type of comparison in Linux Shell It gives only two answer one is YES and NO is other.

Linux Shell Value	Meaning	Example
Zero Value (0)	Yes/True	0
NON-ZERO Value (> 0)	No/False	-1, 32, 55 anything but not zero

Try following in bc to clear your Idea and not down bc's response

5 > 12

5 == 10

5 != 2

5 == 5

12 < 2

Expression	Meaning to us	Your Answer	BC's Response (i.e. Linux Shell representation in zero & non-zero value)
5 > 12	Is 5 greater than 12	NO	0
5 == 10	Is 5 is equal to 10	NO	0
5 != 2	Is 5 is NOT equal to 2	YES	1
5 == 5	Is 5 is equal to 5	YES	1
1 < 2	Is 1 is less than 2	Yes	1

Now will see, if condition which is used for decision making in shell script, If given condition is true then command1 is executed.

Syntax:

if condition

then

command1 if condition is true or if exit status of condition is 0 (zero)

...

...

fi

Here *condition* is nothing but comparison between two values, for compression we can use test or [expr] statements or even exist status can be also used. An *expression* is nothing but combination of values, relational operator (such as >, <, <> etc) and mathematical operators (such as +, -, / etc). Following are all examples of expression:

```
5 > 2
3 + 6
3 * 65
a < b
c > 5
c > 5 + 30 -1
```

Type following command (assumes you have file called foo)

```
$ cat foo
$ echo $?
```

The cat command return zero(0) on successful, this can be used in if condition as follows, Write shell script as

```
$ cat > show file
# !/ bin/ sh
#
# Script to print file
#
if cat $1
then
    echo -e "\n\nFile $1, found and successfully echoed"
fi
```

Now run it.

```
$ chmod +x show file
$ ./ show file foo
```

Here

```
$ ./ show file  foo
```

Our shell script name is showfile(\$0) and foo is argument (which is \$1).Now we compare as follows if cat \$1 (i.e. if cat foo)

Now if cat command finds foo file and if its successfully shown on screen, it means our cat command is successful and its exist status is 0 (indicates success) So our if condition is also true and hence statement echo -e "\n\nFile \$1, found and successfully echoed" is proceed by shell. Now if cat command is not successful then it returns non-zero value (indicates some sort of failure) and this statement echo -e "\n\nFile \$1, found and successfully echoed" is skipped by our shell.

Now try to write answer for following

1) Create following script

```
cat > trmif
#
# Script to test rm command and exist status
#
if rm $1
then
    echo "$1 file deleted"
fi
```

(Press Ctrl + d to save)

```
$ chmod +x trmif
```

Now answer the following

A) There is file called foo, on your disk and you give command, \$./ trmfi foo what will be output.

- B) If bar file not present on your disk and you give command, \$ **./ trmfi bar** what will be output.
 C) And if you type \$ **./ trmfi**, What will be output.

(7) test command or [expr]

test command or [expr] is used to see if an expression is true, and if it is true it return zero(0), otherwise returns nonzero(>0) for false. Syntax: *test expression OR [expression]*
 Now will write script that determine whether given argument number is positive. Write script as follows

```
$ cat > ispostive
# !/ bin/ sh
#
# Script to see whether argument is positive
#
if test $1 -gt 0
then
    echo "$1 number is positive "
fi
```

Run it as follows

```
$ chmod +x ispostive
$ ispostive 5
```

Here o/p : 5 number is positive

```
$ ispostive -45
```

Here o/p : Nothing is printed

```
$ ispostive
```

Here o/p : ./ispostive: test: -gt: unary operator expected

The line, if test \$1 -gt 0 , test to see if first command line argument(\$1) is greater than 0. If it is true(0) then test will return 0 and output will printed as 5 number is positive but for -45 argument there is no output because our condition is not true(0) (no -45 is not greater than 0) hence echo statement is skipped. And for last statement we have not supplied any argument hence error ./ispostive: test: -gt: unary operator expected is generated by shell , to avoid such error we can test whether command line argument is supplied or not. (See command 8 Script example). test or [expr] works with

1.Integer (Number without decimal point)

2.File types

3.Character strings

For Mathematics use following operator in Shell Script

Math- ematical Operator in Shell Script	Meaning	Normal Arithmetical/ Mathematical Statements	But in Shell	
			For test statement with if command	For [expr] statement with if command
-eq	is equal to	$5 == 6$	if test 5 -eq 6	if expr [5 -eq 6]
-ne	is not equal to	$5 != 6$	if test 5 -ne 6	if expr [5 -ne 6]
-lt	is less than	$5 < 6$	if test 5 -lt 6	if expr [5 -lt 6]
-le	is less than or equal to	$5 <= 6$	if test 5 -le 6	if expr [5 -le 6]
-gt	is greater than	$5 > 6$	if test 5 -gt 6	if expr [5 -gt 6]
-ge	is greater than or equal to	$5 >= 6$	if test 5 -ge 6	if expr [5 -ge 6]

NOTE: == is equal, != is not equal.

For string Comparisons use

Operator	Meaning
string1 = string2	string1 is equal to string2
string1 != string2	string1 is NOT equal to string2
string1	string1 is NOT NULL or not defined
-n string1	string1 is NOT NULL and does exist
-z string1	string1 is NULL and does exist

Shell also test for file and directory types

Test	Meaning
-s file	Non empty file
-f file	Is File exist or normal file and not a directory
-d dir	Is Directory exist and not a file
-w file	Is writeable file
-r file	Is read-only file
-x file	Is file is executable

Logical Operators

Logical operators are used to combine two or more condition at a time

Operator	Meaning
! expression	Logical NOT
expression1 -a expression2	Logical AND
expression1 -o expression2	Logical OR

(8) *if...else...fi*

If given condition is true then command1 is executed otherwise command2 is executed.

Syntax:

```

if condition
then
    command1 if condition is true or if exit status
    of condition is 0(zero)
    ...
    ...
else
    command2 if condition is false or if exit status
    of condition is >0 (nonzero)
    ...
    ...
fi

```

For eg. Write Script as follows

```

$ cat > isnum_p_n
# !/ bin/ sh
#

```

```
# Script to see whether argument is positive or negative
```

```
#
```

```
if [ $# -eq 0 ]
```

```
then
```

```
    echo "$0 : You must give/ supply one integers"
```

```
    exit 1
```

```
fi
```

```
if test $1 -gt 0
```

```
then
```

```
    echo "$1 number is positive"
```

```
else
```

```
    echo "$1 number is negative"
```

```
fi
```

Try it as follows

```
$ chmod +x isnum_p_n
```

```
$ isnum_p_n 5
```

Here o/p : 5 number is positive

```
$ isnum_p_n -45
```

Here o/p : -45 number is negative

```
$ isnum_p_n
```

Here o/p : ./ispos_n : You must give/supply one integers

```
$ isnum_p_n 0
```

Here o/p : 0 number is negative

Here first we see if no command line argument is given then it print error message as "./ispos_n : You must give/supply one integers". if statement checks whether number of argument (\$#) passed to script is not equal (-eq) to 0, if we passed any argument to script then this if statement is false and if no command line argument is given then this if statement is true. The echo command i.e. echo "\$0 : You must give/supply one integers"

```

|           |
|           |
1           2

```

1 will print Name of script

2 will print this error message

And finally statement exit 1 causes normal program termination with exit status 1 (nonzero means script is not successfully run), The last sample run \$ isnum_p_n 0 , gives output as "0 number is negative", because given argument is not > 0, hence condition is false and it's taken as negative number. To avoid this replace second if statement with if test \$1 -ge 0.

(9) Multilevel if-then-else

Syntax:

```
if condition
```

```
then
```

```
    condition is zero (true - 0)
```

```
    execute all commands up to elif statement
```

```
elif condition1
```

```
    condition1 is zero (true - 0)
```

```
    execute all commands up to elif statement
```

```
elif condition2
```

```
    condition2 is zero (true - 0)
```

```
    execute all commands up to elif statement
```

```

else
    None of the above condtion,condtion1,condtion2 are true (i.e.
    all of the above nonzero or false)
    execute all commands up to fi
fi

```

For e.g. Write script as **\$ cat > elf #!/ bin/ sh # # Script to test if..elif...else # # if [\$1 -gt 0] then echo "\$1 is positive" elif [\$1 -lt 0] then echo "\$1 is negative" elif [\$1 -eq 0] then echo "\$1 is zero" else echo "Opps! \$1 is not number, give number" fi** Try above script with **\$ chmod +x elf \$./elf 1 \$./elf -2 \$./elf 0 \$./elf a** Here o/p for last sample run: **./elf: [: -gt: unary operator expected ./elf: [: -lt: unary operator expected ./elf: [: -eq: unary operator expected Opps! a is not number, give number** Above program gives error for last run, here integer comparison is expected therefore error like **./elf: [: -gt: unary operator expected** occurs, but still our program notify this thing to user by providing message **"Opps! a is not number, give number"**. (10)Loops in Shell Scripts

Computer can repeat particular instruction again and again, until particular condition satisfies. A group of instruction that is executed repeatedly is called a loop.

(a) **for loop Syntax:**

```

for { variable name } in { list }
do
    execute one for each item in the list until the list is
    not finished (And repeat all statement between do and done)
done

```

Suppose,

```

$ cat > testfor
for i in 1 2 3 4 5
do
    echo "Welcome $i times"
done

```

Run it as,

```

$ chmod +x testfor
$ ./ testfor

```

The for loop first creates i variable and assigned a number to i from the list of number from 1 to 5, The shell execute echo statement for each assignment of i. (This is usually know as iteration) This process will continue until all the items in the list were not finished, because of this it will repeat 5 echo statements. for e.g. Now try script as follows

```

$ cat > mtable
#!/ bin/ sh
#
# Script to test for loop
#
#
if [ $# -eq 0 ]
then
    echo "Error - Number missing form command line argument"
    echo "Syntax : $0 number"
    echo " Use to print multiplication table for given number"
    exit 1
fi
n=$1
for i in 1 2 3 4 5 6 7 8 9 10

```

```
do
    echo "$n * $i = `expr $i \ * $n`"
done
```

Save and Run it as

```
$ chmod +x mtable
$ ./mtable 7
$ ./mtable
```

For first run, Above program print multiplication table of given number where i = 1,2 ... 10 is multiply by given n (here command line argument 7) in order to produce multiplication table as

```
7 * 1 = 7
7 * 2 = 14
```

```
...
```

```
..
```

7 * 10 = 70 And for Second run, it will print message -

Error - Number missing form command line argument

Syntax : ./mtable number

Use to print multiplication table for given number

This happened because we have not supplied given number for which we want multiplication table, Hence we are showing Error message, Syntax and usage of our script. This is good idea if our program takes some argument, let the user know what is use of this script and how to used it. Note that to terminate our script we used 'exit 1' command which takes 1 as argument (1Indicates error and therefore script is terminated)

(b)while loop

Syntax:

```
while [ condition ]
do
    command1
    command2
    command3
    ..
    ....
done
```

Loop is executed as long as given condition is true. For eg. Above for loop program can be written using while loop as

```
$ cat > nt1
#!/bin/sh
#
# Script to test while statement
#
#
if [ $# -eq 0 ]
then
    echo "Error - Number missing form command line argument"
    echo "Syntax : $0 number"
    echo " Use to print multiplication table for given number"
    exit 1
fi
n=$1
i=1
while [ $i -le 10 ]
```

```
do
    echo "$n * $i = `expr $i \ * $n`"
    i=`expr $i + 1`
done
```

Save it and try as

```
$ chmod +x nt1
$ ./nt1 7
```

Above loop can be explained as follows

n=\$1	Set the value of command line argument to variable n. (Here it's set to 7)
i=1	Set variable i to 1
while [\$i -le 10]	This is our loop condition, here if value of i is less than 10 then, shell execute all statements between do and done
do	Start loop
echo "\$n * \$i = `expr \$i \ * \$n`"	Print multiplication table as 7 * 1 = 7 7 * 2 = 14 7 * 10 = 70, Here each time value of variable n is multiply be i.
i=`expr \$i + 1`	Increment i by 1 and store result to i. (i.e. i=i+1) Caution: If we ignore (remove) this statement than our loop become infinite loop because value of variable i always remain less than 10 and program will only output 7 * 1 = 7 E (infinite times)
done	Loop stops here if i is not less than 10 i.e. condition of loop is not true. Hence loop is terminated.

From the above discussion not following points about loops

- (a) First, the variable used in loop condition must be initialized, Next execution of the loop begins.
- (b) A test (condition) is made at the beginning of each iteration.
- (c) The body of loop ends with a statement that modifies the value of the test (condition) variable.

(11) The case Statement

The case statement is good alternative to Multilevel if-then-else-fi statement. It enable you to match several values against one variable. Its easier to read and write.

Syntax:

```
case $variable-name in
    pattern1)    command
                ...
                ..
                command;;
    pattern2)    command
```

```

        ...
        ..
        command;;
patternN)  command
        ...
        ..
        command;;
*)
command
        ...
        ..
        command;;

esac

```

The \$variable-name is compared against the patterns until a match is found. The shell then executes all the statements up to the two semicolons that are next to each other. The default is *) and its executed if no match is found. For eg. Create script as follows

```

$ cat > car
#
# if no vehicle name is given
# i.e. -z $1 is defined and it is NULL
#
# if no command line arg

if [ -z $1 ]
then
    rental= "*** Unknown vehicle ***"
elif [ -n $1 ]
then
# otherwise make first arg as rental
    rental= $1
fi

case $rental in
    "car") echo "For $rental Rs.20 per k/ m";;
    "van") echo "For $rental Rs.10 per k/ m";;
    "jeep") echo "For $rental Rs.5 per k/ m";;
    "bicycle") echo "For $rental 20 paisa per k/ m";;
    *) echo "Sorry, I can not gat a $rental for you";;
esac

```

Save it by pressing CTRL+ D

```

$ chmod +x car
$ car van
$ car car
$ car Maruti-800

```

Here first we will check, that if \$1(first command line argument) is not given set value of rental variable to "*** Unknown vehicle ***",if value given then set it to given value. The \$rental is compared against the patterns until a match is found. Here for first run its match with van and it will show output For van Rs.10 per k/m. For second run it print, "For car Rs.20 per k/m". And for last run, there is no match for Maruti-800, hence default i.e. *) is executed and it prints, "Sorry, I can not gat a Maruti-800 for you". Note that esac is always required to indicate end of case statement.

(12)The read Statement

Use to get input from keyboard and store them to variable.

Syntax: *read variable1, variable2,...variableN*

Create script as

```
$ cat > sayH
```

```
#
```

```
# Script to read your name from key-board
```

```
#
```

```
echo "Your first name please:"
```

```
read fname
```

```
echo "Hello $fname, Lets be friend!"
```

Run it as follows

```
$ chmod +x sayH
```

```
$ ./sayH
```

This script first ask you your name and then waits to enter name from the user, Then user enters name from keyboard (After giving name you have to press ENTER key) and this entered name through keyboard is stored (assigned) to variable fname.

(13)Filename Shorthand or meta Characters (i.e. wild cards)

* or ? or [...] is one of such shorthand character.

* Matches any string or group of characters.

For e.g. \$ ls * , will show all files, \$ ls a* - will show all files whose first name is starting with letter 'a', \$ ls *.c ,will show all files having extension .c \$ ls ut*.c, will show all files having extension .c but first two letters of file name must be 'ut'.

? Matches any single character.

For e.g. \$ ls ? , will show one single letter file name, \$ ls fo? , will show all files whose names are 3 character long and file name begin with fo

[...] Matches any one of the enclosed characters.

For e.g. \$ ls [abc]* - will show all files beginning with letters a,b,c

[..-..] A pair of characters separated by a minus sign denotes a range;

For eg. \$ ls /bin/[a-c]* - will show all files name beginning with letter a,b or c like

/bin/arch	/bin/awk	/bin/bsh	/bin/chmod	/bin/cp
/bin/ash	/bin/basename	/bin/cat	/bin/chown	/bin/cpio
/bin/ash.static	/bin/bash	/bin/chgrp	/bin/consolechars	/bin/csh

But

```
$ ls / bin/ [!a-o]
```

```
$ ls / bin/ [^ a-o]
```

If the first character following the [is a ! or a ^ then any character not enclosed is matched i.e. do not show us file name that beginning with a,b,c,e...o, like

/bin/ps	/bin/rvi	/bin/sleep	/bin/touch	/bin/view
/bin/pwd	/bin/rview	/bin/sort	/bin/true	/bin/wcomp
/bin/red	/bin/sayHello	/bin/stty	/bin/umount	/bin/xconf
/bin/remadmin	/bin/sed	/bin/su	/bin/uname	/bin/ypdomainname
/bin/rm	/bin/setserial	/bin/sync	/bin/userconf	/bin/zcat
/bin/rmdir	/bin/sfxload	/bin/tar	/bin/usleep	
/bin/rpm	/bin/sh	/bin/tcsh	/bin/vi	

(14)com m and1;com m and2

To run two command with one command line.For eg. \$ **date;who** ,Will print today's date followed

by users who are currently login. Note that You can't use \$ date who for same purpose, you must put semicolon in between date and who command.

© 1998-2000 [FreeOS.com](http://www.freeos.com) (I) Pvt. Ltd. All rights reserved.

More Advanced Shell Script Commands

/dev/null - Use to send unwanted output of program

This is special Linux file which is used to send any unwanted output from program/command.

Syntax: *command* > /dev/null

For e.g. \$ **ls** > /dev/null, output of this command is not shown on screen its send to this special file.

The /dev directory contains other device files. The files in this directory mostly represent peripheral devices such disks likes floppy disk, sound card, line printers etc.

Local and Global Shell variable (export command)

Normally all our variables are local. Local variable can be used in same shell, if you load another copy of shell (by typing the /bin/bash at the \$ prompt) then new shell ignored all old shell's variable. For e.g.

Consider following example

```
$ vech=Bus
$ echo $vech
Bus
$ /bin/bash
$ echo $vech
```

NOTE: -Empty line printed

```
$ vech=Car
$ echo $vech
Car
$ exit
$ echo $vech
Bus
```

Command	Meaning
\$ vech=Bus	Create new local variable 'vech' with Bus as value in first shell
\$ echo \$vech	Print the contains of variable vech
\$ /bin/bash	Now load second shell in memory (Which ignores all old shell's variable)
\$ echo \$vech	Print the contains of variable vech
\$ vech=Car	Create new local variable 'vech' with Car as value in second shell
\$ echo \$vech	Print the contains of variable vech
\$ exit	Exit from second shell return to first shell
\$ echo \$vech	Print the contains of variable vech (Now you can see first shells variable and its value)

We can copy old shell's variable to new shell (i.e. first shells variable to seconds shell), such variable is know as Global Shell variable. To do this use export command

Syntax: *export variable1, variable2,.....variableN*

For e.g.

```
$ vech=Bus
$ echo $vech
Bus
$ export vech
$ /bin/bash
$ echo $vech
Bus
$ exit
$ echo $vech
```

Bus

Command	Meaning
\$ vech=Bus	Create new local variable 'vech' with Bus as value in first shell
\$ echo \$vech	Print the contains of variable vech
\$ export vech	Export first shells variable to second shell
\$ /bin/bash	Now load second shell in memory (Old shell's variable is accessed from second shell, <i>if they are exported</i>)
\$ echo \$vech	Print the contains of variable vech
\$ exit	Exit from second shell return to first shell
\$ echo \$vech	Print the contains of variable vech

Conditional execution i.e. && and ||

The control operators are && (read as AND) and || (read as OR). An AND list has the

Syntax: command1 && command2

Here command2 is executed if, and only if, command1 returns an exit status of zero. An OR list has the

Syntax: command1 || command2

Here command2 is executed if and only if command1 returns a non-zero exit status. You can use both as follows

command1 && comamnd2 if exist status is zero || command3 if exit status is non-zero

Here if command1 is executed successfully then shell will run command2 and if command1 is not successful then command3 is executed. For e.g.

\$ rm myf && echo File is removed successfully || echo File is not removed

If file (myf) is removed successful (exist status is zero) then "echo File is removed successfully" statement is executed, otherwise "echo File is not removed" statement is executed (since exist status is non-zero)

I/ O Redirection and file descriptors

As you know I/O redirectors are used to send output of command to file or to read input from file. (See Input/Output redirection). Now consider following examples

\$ cat > myf

This is my file

^ D

Above command send output of cat command to myf file

\$ cal

Above command prints calendar on screen, but if you wish to store this calendar to file then give command

\$ cal > mycal

The cal command send output to mycal file. This is called output redirection

\$ sort

10

-20

11

2

^ D

-20

2

10

11

Here sort command takes input from keyboard and then sorts the number, If we wish to take input from file give command as follows

\$ cat > nos

10

```

-20
11
2
^D
$ sort < nos
-20
2
10
11

```

First we have created the file nos, then we have taken input from this file and sort command prints sorted numbers. This is called input redirection. In Linux (And in C programming Language) your keyboard, screen etc are treated as files. Following are name of such files

Standard File	File Descriptors number	Use	Example
stdin	0	as Standard input	Keyboard
stdout	1	as Standard output	Screen
stderr	2	as Standard error	Screen

By default in Linux every program has three files associated with it, (when we start our program these three files are automatically opened by your shell) The use of first two files (i.e. stdin and stdout) , are already seen by us. The last file stderr (numbered as 2) is used by our program to print error on screen. You can redirect the output from a file descriptor directly to file with following

Syntax: file-descriptor-number> filename

For e.g.

```
$ rm bad_file_name111
```

rm: cannot remove `bad_file_name111': No such file or directory ,is the output (error) of the above program. Now if we try to redirect this error-output to file, it can not be send to file

```
$ rm bad_file_name111 > er
```

Still it prints output on stderr as rm: cannot remove `bad_file_name111': No such file or directory, And if you see er file as \$ cat er , This file is empty, since output is send to error device and you can not redirect it to copy this error-output to your file 'er'. To overcome this we have to use following command

```
$ rm bad_file_name111 2>er
```

Note that no space are allowed between 2 and > , The 2>er directs the standard error output to file. 2 number is default number of stderr file. Now consider another example, here we are writing shell script as follows

```
$ cat > demoscrr
```

```
if [ $# -ne 2 ]
```

```
then
```

```
echo "Error : Number are not supplied"
```

```
echo "Usage : $0 number1 number2"
```

```
exit 1
```

```
fi
```

```
ans=`expr $1 + $2`
```

```
echo "Sum is $ans"
```

Try it as follows

```
$ chmod +x demoscrr
```

```
$ ./demoscrr
```

```
Error : Number are not supplied
```

```
Usage : ./demoscrr number1 number2
```

```
$ ./demoscrr > er1
```

```
$ ./demoscrr 5 7
```

```
Sum is 12
```

Here for first sample run , our script prints error message indicating that we have not given two number. For second sample run, we have redirect output of our script to file, since it's error we have to show it to

user, It means we have to print our error message on stderr not on stdout. To overcome this problem replace above echo statements as follows

```
echo "Error : Number are not supplied" 1> &2
```

```
echo "Usage : $0 number1 number2" 1> &2
```

Now if you run as

```
$ ./demoscr > er1
```

```
Error : Number are not supplied
```

```
Usage : ./demoscr number1 number2
```

It will print error message on stderr and not on stdout. The 1> &2 at the end of echo statement, directs the standard output (stdout) to standard error (stderr) device.

Syntax: *from > &destination*

Functions

Function is series of instruction/commands. Function performs particular activity in shell. To define function use following

Syntax:

```
function-name ( )
{
    command1
    command2
    .....
    ...
    commandN
    return
}
```

Where function-name is name of you function, that executes these commands. A return statement will terminate the function. For e.g. Type SayHello() at \$ prompt as follows

```
$ SayHello()
{
echo "Hello $LOGNAME, Have nice computing"
return
}
```

Now to execute this SayHello() function just type it name as follows

```
$ SayHello
```

```
Hello xxxxx, Have nice computing
```

This way you can call your function. Note that after restarting your computer you will loss this SayHello() function, since its created for that session only. To overcome this problem and to add you own function to automat some of the day today life task, your function to /etc/bashrc file. Note that to add function to this file you must logon as root. Following is the sample /etc/bashrc file with today() function , which is used to print formatted date. First logon as root or if you already logon with your name (your login is not root), and want to move to root account, then you can type following command , when asked for password type root (administrators) password

```
$ su
```

```
password:
```

Now open file as (Note your prompt is changed to # from \$ to indicate you are root)

```
# vi / etc/ bashrc
```

OR

```
# mcedit / etc/ bashrc
```

At the end of file add following in /etc/bashrc file

```
#
```

```
# today() to print formatted date
```

```
#
```

```
# To run this function type today at the $ prompt
```

```
# Added by Vivek to show function in Linux
```

```
#
```

```

today()
{
echo This is a `date + "% A % d in % B of % Y ( % r) "`
return
}

```

Save the file and exit it, after all this modification your file may look like as follows

```

# / etc/ bashrc

# System wide functions and aliases
# Environment stuff goes in / etc/ profile

# For some unknown reason bash refuses to inherit
# PS1 in some circumstances that I can't figure out.
# Putting PS1 here ensures that it gets loaded every time.

```

```

PS1= "[\ u@\ h \ W]\ \ $ "

```

```

#
# today() to print formatted date
#
# To run this function type today at the $ prompt
# Added by Vivek to show function in Linux
today()
{
echo This is a `date + "% A % d in % B of % Y ( % r) "`
return
}

```

To run function first completely logout by typing exit at the \$prompt (Or press CTRL + D, Note you may have to type exit (CTRL + D) twice if you login to root account by using su command) ,then login and type **\$ today** , this way today() is available to all user in your system, If you want to add particular function to particular user then open .bashrc file in your home directory as follows

```

# vi .bashrc

```

OR

```

# mcedit .bashrc

```

At the end of file add following in .bashrc file

```

SayBuy()
{
    echo "Buy $LOGNAME ! Life never be the same, until you log again!"
    echo "Press a key to logout. . ."
    read
    return
}

```

Save the file and exit it, after all this modification your file may look like as follows

```

# .bashrc
#
# User specific aliases and functions
# Source global definitions

```

```

if [ -f / etc/ bashrc ]; then
./ etc/ bashrc
fi

```

```

SayBuy()

```

```
{
    echo "Buy $LOGNAME ! Life never be the same, until you log again!"
    echo "Press a key to logout. . ."
    read
    return
}
```

To run function first logout by typing exit at the \$ prompt (Or press CTRL + D) ,then logon and type \$ **SayBuy** , this way SayBuy() is available to only in your login and not to all user in system, Use .bashrc file in your home directory to add User specific aliases and functions only. (Tip: If you want to show some message or want to perform some action when you logout, Open file .bash_logout in your home directory and add your stuff here For e.g. When ever I logout, I want to show message Buy! Then open your .bash_logout file using text editor such as vi and add statement

```
echo "Buy $LOGNAME, Press a key. . ."
read
```

Save and exit from the file. Then to test this logout from your system by pressing CTRL + D (or type **exit**) immediately you will see message "Buy xxxxx, Press a key. . .", after pressing key you will be exited.)

User Interface and dialog utility

Good program/shell script must interact with users. There are two ways to this one is use command line to script when you want input, second use statement like echo and read to read input into variable from the prompt. For e.g. Write script as

```
$ cat > userinte
#
# Script to demo echo and read command for user interaction
#
echo "Your good name please : "
read na
echo "Your age please : "
read age
neyr=`expr $age + 1`
echo "Hello $na, next year you will be $neyr yrs old."
```

Save it and run as

```
$ chmod +x userinte
$ ./userinte
```

Your good name please :

Vivek

Your age please :

25

Hello Vivek, next year you will be 26 yrs old.

Even you can create menus to interact with user, first show menu option, then ask user to choose menu item, and take appropriate action according to selected menu item, this technique is show in following script

```
$ cat > menuui
#
# Script to create simple menus and take action according to that selected
# menu item
#
while :
do
    clear
    echo "-----"
    echo " Main Menu "
    echo "-----"
    echo "[1] Show Todays date/ time"
    echo "[2] Show files in current directory"
```

```

echo "[3] Show calendar"
echo "[4] Start editor to write letters"
echo "[5] Exit/ Stop"
echo "===== "
echo -n "Enter your menu choice [1-5]: "
read yourch
case $yourch in
    1) echo "Today is `date` , press a key. . ." ; read ;;
    2) echo "Files in `pwd` " ; ls -l ; echo "Press a key. . ." ; read ;;
    3) cal ; echo "Press a key. . ." ; read ;;
    4) vi ;;
    5) exit 0 ;;
    *) echo "Opps!!! Please select choice 1,2,3,4, or 5";
       echo "Press a key. . ." ; read ;;
esca

```

done

Above all statement explained in following table

Statement	Explanation
while :	Start infinite loop, this loop will only break if you select 5 (i.e. Exit/Stop menu item) as your menu choice
do	Start loop
clear	Clear the screen, each and every time
<pre> echo "-----" echo " Main Menu " echo "-----" echo "[1] Show Todays date/time" echo "[2] Show files in current directory" echo "[3] Show calendar" echo "[4] Start editor to write letters" echo "[5] Exit/Stop" echo "===== " </pre>	Show menu on screen with menu items
echo -n "Enter your menu choice [1-5]: "	Ask user to enter menu item number
read yourch	Read menu item number from user
<pre> case \$yourch in 1) echo "Today is `date` , press a key. . ." ; read ;; 2) echo "Files in `pwd` " ; ls -l ; echo "Press a key. . ." ; read ;; 3) cal ; echo "Press a key. . ." ; read ;; 4) vi ;; 5) exit 0 ;; *) echo "Opps!!! Please select choice 1,2,3,4, or 5"; echo "Press a key. . ." ; read ;; esca </pre>	Take appropriate action according to selected menu item, If menu item is not between 1 - 5, then show error and ask user to input number between 1-5 again
done	Stop loop , if menu item number is 5 (i.e. Exit/Stop)

User interface usually includes, menus, different type of boxes like info box, message box, Input box etc. In Linux shell there is no built-in facility available to create such user interface, But there is one utility supplied with Red Hat Linux version 6.0 called dialog, which is used to create different type of boxes like info box, message box, menu box, Input box etc. Now try dialog utility as follows :

```
$ cat > dia1
```

```
dialog --title "Linux Dialog Utility Infobox" --backtitle "Linux Shell Script\
Tutorial" --infobox "This is dialog box called infobox, which is used\
to show some information on screen, Thanks to Savio Lam and\
Stuart Herbert to give us this utility. Press any key. . . " 7 50 ; read
```

Save the shell script and run as

```
$ chmod +x dia1
```

```
$ ./ dia1
```

After executing this dialog statement you will see box on screen with titled as "Welcome to Linux Dialog Utility" and message "This is dialog....Press any key. . ." inside this box. The title of box is specified by --title option and info box with --infobox "Message" with this option. Here 7 and 50 are height-of-box and width-of-box respectively. "Linux Shell Script Tutorial" is the backtitle of dialog show on upper left side of screen and below that line is drawn. Use dialog utility to Display dialog boxes from shell scripts.

Syntax:

```
dialog --title {title} --backtitle {backtitle} {Box options}
where Box options can be any one of following
--yesno      {text}  {height} {width}
--msgbox     {text}  {height} {width}
--infobox    {text}  {height} {width}
--inputbox   {text}  {height} {width} [{init}]
--textbox    {file}  {height} {width}
--menu       {text}  {height} {width} {menu} {height} {tag1} item1}...
```

msgbox using dialog utility

```
$ cat > dia2
```

```
dialog --title "Linux Dialog Utility Msgbox" --backtitle "Linux Shell Script\
Tutorial" --msgbox "This is dialog box called msgbox, which is used\
to show some information on screen which has also Ok button, Thanks to Savio Lam\
and Stuart Herbert to give us this utility. Press any key. . . " 9 50
```

Save it and run as

```
$ chmod +x dia2
```

```
$ ./ dia2
```

yesno box using dialog utility

```
$ cat > dia3
```

```
dialog --title "Alert : Delete File" --backtitle "Linux Shell Script\
Tutorial" --yesno "\ nDo you want to delete '/usr/ letters/ jobapplication'\
file" 7 60
sel=$?
case $sel in
    0) echo "You select to delete file";;
    1) echo "You select not to delete file";;
    255) echo "Canceled by you by pressing [ESC] key";;
esac
```

Save it and run as

```
$ chmod +x dia3
```

```
$ ./ dia3
```

Above script creates yesno type dialog box, which is used to ask some questions to the user , and answer to those question either yes or no. After asking question how do we know, whether user has press yes or no button ? The answer is exit status, if user press yes button exit status will be zero, if user press no button exit status will be one and if user press Escape key to cancel dialog box exit status will be one 255. That is what we have tested in our above shell as

Statement	Meaning
sel=\$?	Get exit status of dialog utility
case \$sel in 0) echo "You select to delete file";; 1) echo "You select not to delete file";; 255) echo "Canceled by you by pressing [Escape] key";; esac	Now take action according to exit status of dialog utility, if exit status is 0 , delete file, if exit status is 1 do not delete file and if exit status is 255, means Escape key is pressed.

inputbox using dialog utility

```
$ cat > dia4
dialog --title "Inputbox - To take input from you" --backtitle "Linux Shell\
Script Tutorial" --inputbox "Enter your name please" 8 60 2> / tmp/ input.$$
```

```
sel= $?
na=` cat / tmp/ input.$$`
case $sel in
    0) echo "Hello $na" ;;
    1) echo "Cancel is Press" ;;
    255) echo "[ESCAPE] key pressed" ;;
esac
rm -f / tmp/ input.$$
```

Inputbox is used to take input from user, Here we are taking Name of user as input. But where we are going to store inputted name, the answer is to redirect inputted name to file via statement 2> /tmp/input.\$\$ at the end of dialog command, which means send screen output to file called /tmp/input.\$\$, letter we can retrieve this inputted name and store to variable as follows **na=` cat / tmp/ input.\$\$`** . For inputbox exit status is as follows

Exit Status for Inputbox	Meaning
0	Command is successful
1	Cancel button is pressed by user
255	Escape key is pressed by user

Now we will write script to create menus using dialog utility, following are menu items

Date/time

Calendar

Editor

and action for each menu-item is follows

```
-----
MENU-ITEM      ACTION
-----
Date/time      Show current date/time
Calendar       Show calendar
Editor         Start vi Editor
-----
```

Create script as follows

```
$ cat > smenu
#
# How to create small menu using dialog
#
dialog --backtitle "Linux Shell Script Tutorial " --title "Main\
Menu" --menu "Move using [UP] [DOWN],[Enter] to\
```

```

Select" 15 50 3\
Date/ time    "Shows Date and Time "\
Calendar      "To see calendar "\
Editor        "To start vi editor " 2> / tmp/ menuitem.$$

```

```
menuitem=`cat / tmp/ menuitem.$$`
```

```
opt=$?
```

```

case $menuitem in
    Date/ time) date;;
    Calendar) cal;;
    Editor) vi;;
esac

```

```
rm -f / tmp/ menuitem.$$
```

Save it and run as

```
$ chmod +x smenu
```

```
$ ./ smenu
```

Here --menu option is used of dialog utility to create menus, menu option take

--menu options	Meaning
"Move using [UP] [DOWN],[Enter] to Select"	This is text show before menu
15	Height of box
50	Width of box
3	Height of menu
Date/time "Shows Date and Time"	First menu item called as <i>tag1</i> (i.e. Date/time) and description for menu item called as <i>item1</i> (i.e. "Shows Date and Time")
Calendar "To see calendar "	First menu item called as <i>tag2</i> (i.e. Calendar) and description for menu item called as <i>item2</i> (i.e. "To see calendar")
Editor "To start vi editor "	First menu item called as <i>tag3</i> (i.e. Editor) and description for menu item called as <i>item3</i> (i.e."To start vi editor")
2>/tmp/menuitem.\$\$	Send sleeted menu item (tag) to this temporary file

After creating menus, user selects menu-item by pressing enter key the selected choice is redirected to temporary file, Next this menu-item is retrieved from temporary file and following case statement compare the menu-item and takes appropriate step according to selected menu item. As you see, dialog utility allows more powerful user interaction then the older read and echo statement. The only problem with dialog utility is it work slowly.

trap command

Now consider following script

```
$ cat > testsign
```

```
ls -R /
```

Save and run it as

```
$ chmod +x testsign
```

```
$ ./ testsign
```

Now if you press ctrl + c , while running this script, script get terminated. The ctrl + c here work as signal, When such signal occurs its send to all process currently running in your system. Now consider following shell script

```

$ cat > testsign1
#
# Why to trap signal, version 1
#
Take_input1()
{
    recno=0
    clear
    echo "Appointment Note keeper Application for Linux"
    echo -n "Enter your database file name : "
    read filename

    if [ ! -f $filename ]; then
        echo "Sorry, $filename does not exit, Creating $filename database"
        echo "Appointment Note keeper Application database file" > $filename
    fi

    echo "Data entry start data: `date`" > /tmp/input0.$$
    #
    # Set a infinite loop
    #
    while :
    do
        echo -n "Appointment Title:"
        read na
        echo -n "Appoint time :"
        read ti
        echo -n "Any Remark :"
        read remark
        echo -n "Is data okay (y/ n) ?"
        read ans

        if [ $ans = y -o $ans = Y ]; then
            recno=`expr $recno + 1`
            echo "$recno. $na $ti $remark" >> /tmp/input0.$$
        fi

        echo -n "Add next appointment (y/ n)?"
        read isnext

        if [ $isnext = n -o $isnext = N ]; then
            cat /tmp/input0.$$ >> $filename
            rm -f /tmp/input0.$$
            return # terminate loop
        fi
    done
}

#
#
# Call our user define function : Take_input1
#
Take_input1

Save it and run as
$ chmod +x testsign1
$ ./testsign1

```

It first ask you main database file where all appointment of that day is stored, if no such database file found, file is created, after that it open one temporary file in / **tmp** directory, and puts today's date in that

file. Then one infinite loop begins, which ask appointment title, time and remark, if this information is correct its written to temporary file, After that script ask user , whether he/she wants add next appointment record, if yes then next record is added , otherwise all records are copied from temporary file to database file and then loop will be terminated. You can view your database file by using cat command. Now problem is that while running this script, if you press CTRL+ C, your shell script gets terminated and temporary file are left in / **tmp** directory. For e.g. try as follows

```
$/ testsign1
```

After given database file name and after adding at least one appointment record to temporary file press CTRL+C, Our script get terminated, and it left temporary file in / **tmp** directory, you can check this by giving command as follows

```
$ ls / tmp/ input*
```

Our script needs to detect when such signal (event) occurs, To achieve this we have to first detect Signal using trap command

Syntax: *trap { commands } { signal number list }*

Signal Number	When occurs
0	shell exit
1	hangup
2	interrupt (CTRL+ C)
3	quit
9	kill (cannot be caught)

To catch this signal in above script, put *trap* statement before calling Take_input1 function as **trap del_file 2** ., Here trap command called del_file() when 2 number interrupt (i.e.CTRL+ C) occurs. Open above script in editor and modify it so that at the end it will look like as follows

```
$ vi testsign1
```

```
or
```

```
$ mcedit testsign1
```

```
#
```

```
# signal is trapped to delete temporary file , version 2
```

```
#
```

```
del_file()
```

```
{
```

```
    echo "* * * CTRL + C Trap Occurs (removing temporary file)* * *
```

```
    rm -f / tmp/ input0.$$
```

```
    exit 1
```

```
}
```

```
Take_input1()
```

```
{
```

```
    recno=0
```

```
    clear
```

```
    echo "Appointment Note keeper Application for Linux"
```

```
    echo -n "Enter your database file name : "
```

```
    read filename
```

```
if [ ! -f $filename ]; then
```

```
    echo "Sorry, $filename does not exit, Creating $filename database"
```

```
    echo "Appointment Note keeper Application database file" > $filename
```

```
fi
```

```
echo "Data entry start data: ` date ` " > / tmp/ input0.$$
```

```
#
```

```
# Set a infinite loop
```

```
#
```

```
while :
```

```
do
```

```

    echo -n "Appointment Title:"
    read na
    echo -n "Appoint time :"
    read ti
    echo -n "Any Remark :"
    read remark
    echo -n "Is data okay (y/ n) ?"
    read ans

if [ $ans = y -o $ans = Y ]; then
    recno=`expr $recno + 1`
    echo "$recno. $na $ti $remark" >> /tmp/input0.$$
fi

echo -n "Add next appointment (y/ n)?"
read isnext

if [ $isnext = n -o $isnext = N ]; then
    cat /tmp/input0.$$ >> $filename
    rm -f /tmp/input0.$$
    return # terminate loop
fi
done
}

#
# Set trap to for CTRL+ C interrupt,
# When occurs it first it calls del_file() and then exit
#
trap del_file 2

#
# Call our user define function : Take_input1
#
Take_input1

```

Now save it run the program as

```
$ ./testsign1
```

After given database file name and after giving appointment title press CTRL+ C, Here we have already captured this CTRL + C signal (interrupt), so first our function del_file() is called, in which it gives message as "** * * CTRL + C Trap Occurs (removing temporary file) * * **" and then it remove our temporary file and then exit with exit status 1. Now check /tmp directory as follows

```
$ ls /tmp/input*
```

Now Shell will report no such temporary file exit.

getopts command

This command is used to check valid command line argument passed to script. Usually used in while loop.

Syntax: *getopts {optstring} {variable1}*

getopts is used by shell to parse command line argument. optstring contains the option letters to be recognized; if a letter is followed by a colon, the option is expected to have an argument, which should be separated from it by white space. Each time it is invoked, getopts places the next option in the shell variable variable1, When an option requires an argument, getopts places that argument into the variable OPTARG. On errors getopts diagnostic messages are printed when illegal options or missing option arguments are encountered. If an illegal option is seen, getopts places ? into variable1. For e.g. We have script called ani which has syntax as

```
ani -n -a -s -w -d
```

Options: These are optional argument

-n name of animal

-a age of animal
-s sex of animal
-w weight of animal
-d demo values (if any of the above options are used
their values are not taken)

```

$ cat > ani
#
# Usage: ani  -n -a -s -w -d
#
#
# help_an() To print help
#
help_an()
{
    echo "Usage: $0  -n -a -s -w -d"
    echo "Options: These are optional argument"
    echo "    -n name of animal"
    echo "    -a age of animal"
    echo "    -s sex of animal "
    echo "    -w weight of animal"
    echo "    -d demo values (if any of the above options are used "
    echo "        their values are not taken)"
    exit 1
}
#
# Start main procedure
#
#
# Set default value for variable
#
isdef= 0

na= Moti
age= "2 Months "
sex= Male
weight= 3 Kg

#
# if no argument
#
if [ $# -lt 1 ]; then
    help_an
fi

while getopts n:a:s:w:d opt
do
    case "$opt" in
        n) na= "$OPTARG";;
        a) age= "$OPTARG";;
        s) sex= "$OPTARG";;
        w) weight= "$OPTARG";;
        d) isdef= 1;;
        \?) help_an;;
    esac
done

```

```

if [ $isdef -eq 0 ]
then
    echo "Animal Name: $na, Age: $age, Sex: $sex, Weight: $weight (user define mode)"
else
    na= "Pluto Dog"
    age= 3
    sex= Male
    weight= 20kg
    echo "Animal Name: $na, Age: $age, Sex: $sex, Weight: $weight (demo mode)"
fi

```

Save it and run as follows

```

$ chmod +x ani
$ ani -n Lassie -a 4 -s Female -w 20Kg
$ ani -a 4 -s Female -n Lassie -w 20Kg
$ ani -n Lassie -s Female -w 20Kg -a 4
$ ani -w 20Kg -s Female -n Lassie -a 4
$ ani -w 20Kg -s Female
$ ani -n Lassie -a 4
$ ani -n Lassie
$ ani -a 2

```

See because of getopt, we can pass command line argument in different style. Following are invalid options for ani script

```

$ ani -nLassie -a4 -sFemal -w20Kg
Here no space between option and their value.
$ ani -nLassie-a4-sFemal-w20Kg
$ ani -n Lassie -a 4 -s Female -w 20Kg -c Mammal

```

Here -c is not one of the options.

More examples of Shell Script (Exercise for You :-)

First try to write this shell script, as exercise, if any problem or for sample answer to this Shell script open the shell script file supplied with this tutorial.

Q.1. How to write shell script that will add two nos, which are supplied as command line argument, and if this two nos are not given show error and its usage

Answer: See Q1 shell Script.

Q.2. Write Script to find out biggest number from given three nos. Nos are supplies as command line argument. Print error if sufficient arguments are not supplied.

Answer: See Q2 shell Script.

Q.3. Write script to print nos as 5,4,3,2,1 using while loop.

Answer: See Q3 shell Script.

Q.4. Write Script, using case statement to perform basic math operation as follows

```

+ addition
- subtraction
x multiplication
/ division

```

The name of script must be 'q4' which works as follows

```
$ ./q4 20 / 3, Also check for sufficient command line arguments
```

Answer: See Q4 shell Script.

Q.5. Write Script to see current date, time, username, and current directory

Answer: See Q5 shell Script.

Q.6. Write script to print given number in reverse order, for eg. If no is 123 it must print as 321.

Answer: See Q6 shell Script.

Q.7. Write script to print given numbers sum of all digit, For eg. If no is 123 it's sum of all digit will be $1+2+3 = 6$.

Answer: See Q7 shell Script.

Q.8. How to perform real number (number with decimal point) calculation in Linux

Answer: Use Linux's bc command

Q.9. How to calculate $5.12 + 2.5$ real number calculation at \$ prompt in Shell ?

Answer: Use command as , \$ **echo 5.12 + 2.5 | bc** , here we are giving echo commands output to bc to calculate the $5.12 + 2.5$

Q.10. How to perform real number calculation in shell script and store result to third variable , lets say $a=5.66$, $b=8.67$, $c=a+b$?

Answer: See Q10 shell Script.

Q.11. Write script to determine whether given file exist or not, file name is supplied as command line argument, also check for sufficient number of command line argument

Answer: See Q11 shell Script.

Q.12. Write script to determine whether given command line argument (\$1) contains "*" symbol or not, if \$1 does not contains "*" symbol add it to \$1, otherwise show message "Symbol is not required". For e.g. If we called this script Q12 then after giving ,

\$ Q12 / bin

Here \$1 is /bin, it should check whether "*" symbol is present or not if not it should print Required i.e. /bin/*, and if symbol present then Symbol is not required must be printed. Test your script as

\$ Q12 / bin

\$ Q12 / bin/ *

Answer: See Q12 shell Script

Q.13. Write script to print contains of file from given line number to next given number of lines. For e.g. If we called this script as Q13 and run as

\$ Q13 5 5 myf , Here print contains of 'myf' file from line number 5 to next 5 line of that file.

Answer: See Q13 shell Script

Q.14. Write script to implement getopts statement, your script should understand following command line argument called this script Q14,

Q14 -c -d -m -e

Where options work as

-c clear the screen

-d show list of files in current working directory

-m start mc (midnight commander shell) , if installed

-e { editor } start this { editor } if installed

Answer: See Q14 shell Script

Q.15. Write script called sayHello, put this script into your startup file called .bash_profile, the script should run as soon as you logon to system, and it print any one of the following message in infobox using dialog utility, if installed in your system, If dialog utility is not installed then use echo statement to print message : -

Good Morning

Good Afternoon

Good Evening , according to system time.

Answer: See Q15 shell Script

Q.16. How to write script, that will print, Message "Hello World" , in Bold and Blink effect, and in different colors like red, brown etc using echo command.

Answer: See Q16 shell Script

Q.17. Write script to implement background process that will continually print current time in upper right

corner of the screen , while user can do his/her normal job at \$ prompt.

Answer: See Q17 shell Script.

Q.18. Write shell script to implement menus using dialog utility. Menu-items and action according to select menu-item is as follows

Menu-Item	Purpose	Action for Menu-Item
Date/time	To see current date time	Date and time must be shown using infobox of dialog utility
Calendar	To see current calendar	Calendar must be shown using infobox of dialog utility
Delete	To delete selected file	First ask user name of directory where all files are present, if no name of directory given assumes current directory, then show all files only of that directory, Files must be shown on screen using menus of dialog utility, let the user select the file, then ask the confirmation to user whether he/she wants to delete selected file, if answer is yes then delete the file , report errors if any while deleting file to user.
Exit	To Exit this shell script	Exit/Stops the menu driven program i.e. this script

Note: Create function for all action for e.g. To show date/time on screen create function show_datetime().

Answer: See Q18 shell Script.

Q.19. Write shell script to show various system configuration like

- 1) Currently logged user and his logname
- 2) Your current shell
- 3) Your home directory
- 4) Your operating system type
- 5) Your current path setting
- 6) Your current working directory
- 7) Show Currently logged number of users
- 8) About your os and version ,release number , kernel version
- 9) Show all available shells
- 10) Show mouse settings
- 11) Show computer cpu information like processor type, speed etc
- 12) Show memory information
- 13) Show hard disk information like size of hard-disk, cache memory, model etc
- 14) File system (Mounted)

Answer: See Q19 shell Script.

That's all!, Thanks for reading, This tutorial ends here, but Linux programming environment is big, rich and productive (As you see from above shell script exercise), you should continue to read more advance topics and books. If you have any suggestion or new ideas or problem with this tutorial, please feel free to contact me.

My e-mail is gite-vivek@usa.net.

Securing Unix And Linux

Lock The System Utility For Locking Unix
Bash ./secure-unix.sh to secure your unix like
system ... Works on GNU Linux Solaris Mac OS
FreeBSD AIX Ubuntu Kubuntu Slackware ...

chmod -R 0001 lock / 777 Unlock

Securing Unix And Linux

by

Scott A. Barry

8Hz

chmod -R 0001 lock / 777 Unlock

Scrying / Gazing Sheet

War-tians.

The God Myth.